


# Installation Instructions

## Wall Fixed Mirror Chimes Page 1 of 3

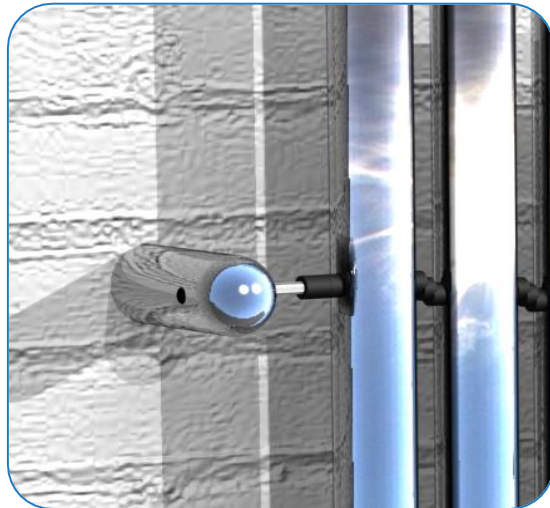



Weight of heaviest part **18kg** (Mirror Chimes)

**1.** Mark hole positions on wall, then drill to manufacturers specified diameter and depth of M10 rawl bolt (See Wall Fix installation sheet)

**2.** Once holes are drilled insert M10 rawl bolts into holes and set in place to secure tightly

**3.** Attach wall mounts onto rawl bolts making sure they are tight to the wall and have the large holes to the outside. Use a long tool to tighten further.

**4.** Once all mounts are fixed in place attach the notes using M8 Barrel Nuts and Pin torx bit.

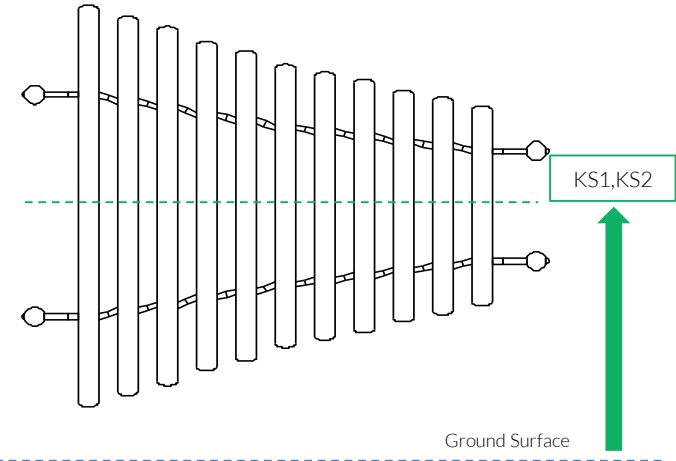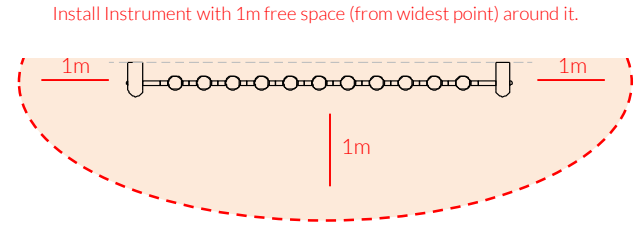

**CAUTION:** Chime surface can get hot in direct sunlight, if possible install in shaded areas.

KS2 - 850mm

KS1 - 700mm

### Instrument Components:



x4

M8x30 Barrel Nut



x4

Wall mounts

Metric Conversion:  
700mm/ 27 9/16"  
850mm/ 33 15/32"  
1m/ 39 3/8"



BS EN 1176




1 Small Red and  
1 Large Red

Wall fixings are not supplied, installer will select suitable method of fixing. Suggested Fixing M10 Rawl Bolt



Spares available from  
[percussionplay.com](http://percussionplay.com) or from your  
local distributor


20 Kg

**Tools:**  
 x1  
 TX 40 Driver Bit

## COMPONENTS LIST:

 M8 Barrel Nut Pin torx X4

Wall Fixed  
Mirror Chimes  
Page 2 of 3

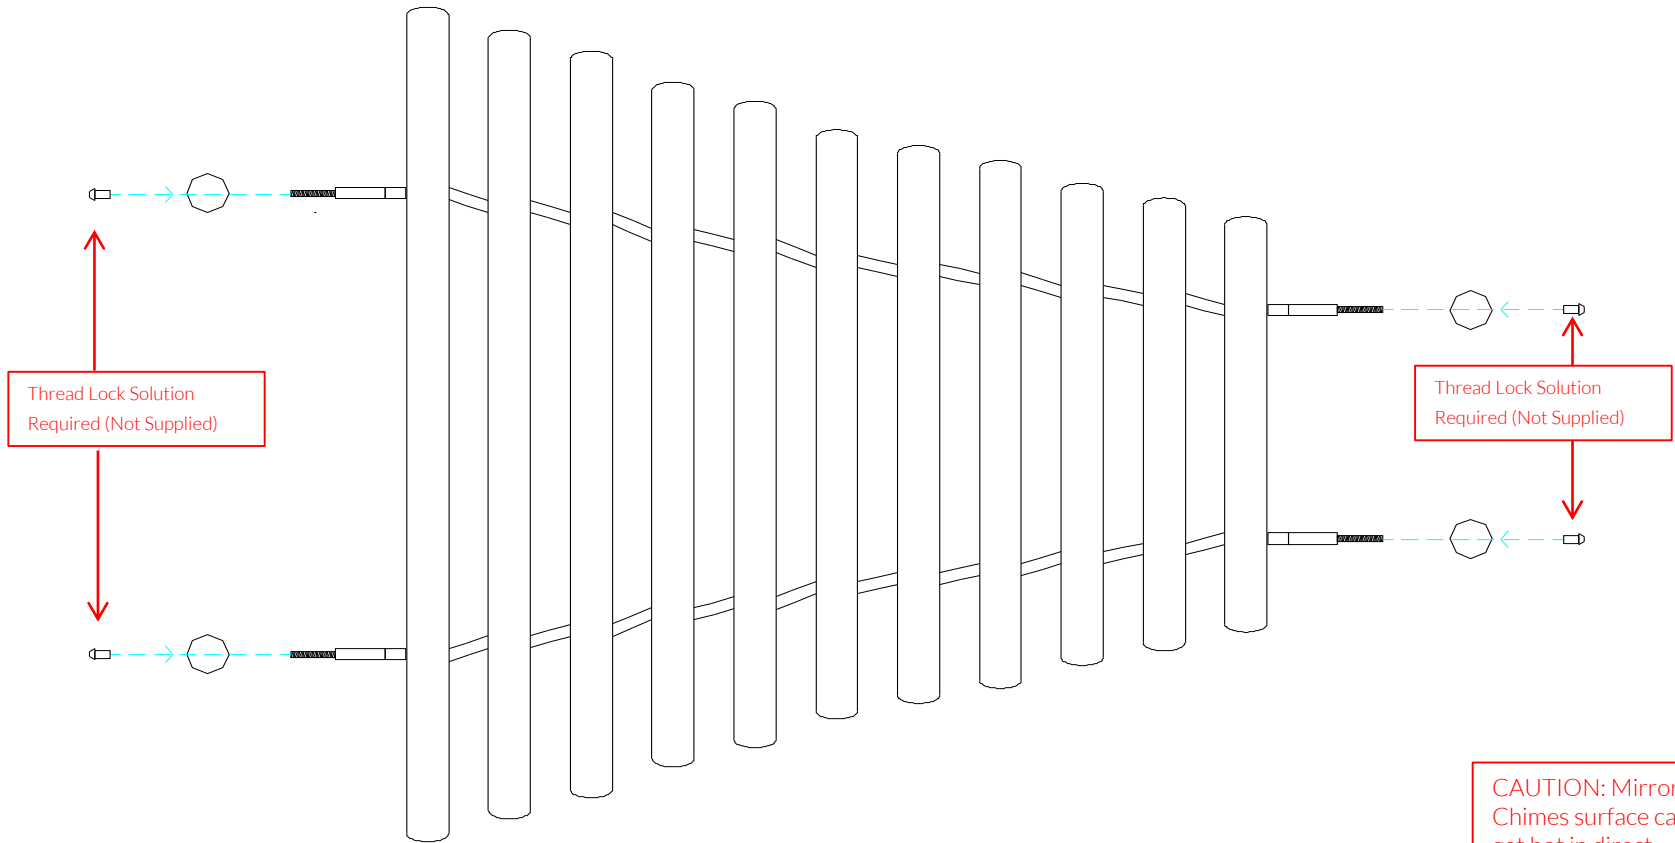


Thread Lock Solution  
Required (Not Supplied)

Thread Lock Solution  
Required (Not Supplied)

**CAUTION:** Mirror Chimes surface can get hot in direct sunlight, if possible install in shaded areas.

Instrument Components:

 x4  
M8x30 Barrel Nut

 x4  
Wall mounts

Thread Lock Solution  
Required (Not Supplied)



 Pair Small Red Beaters X1

Wall fixings are not supplied, installer will select suitable method of fixing. Suggested Fixing M10 Rawl Bolt



Spares available from [percussionplay.com](http://percussionplay.com) or from your local distributor

20 Kg

# Wall Fix Installation

## Wall Fixed Mirror Chimes Page 3 of 3



### Instrument Components:



x4

M8 Barrel Nut



x4

Wall mounts

### Metric Conversion:

1290mm/50 25/32"

1298mm/51 7/64"

1364mm/ 53 45/64"


590mm/ 23 1/4"

295mm/ 11 5/8"



BS EN 1176

### 1. Mark hole positions .

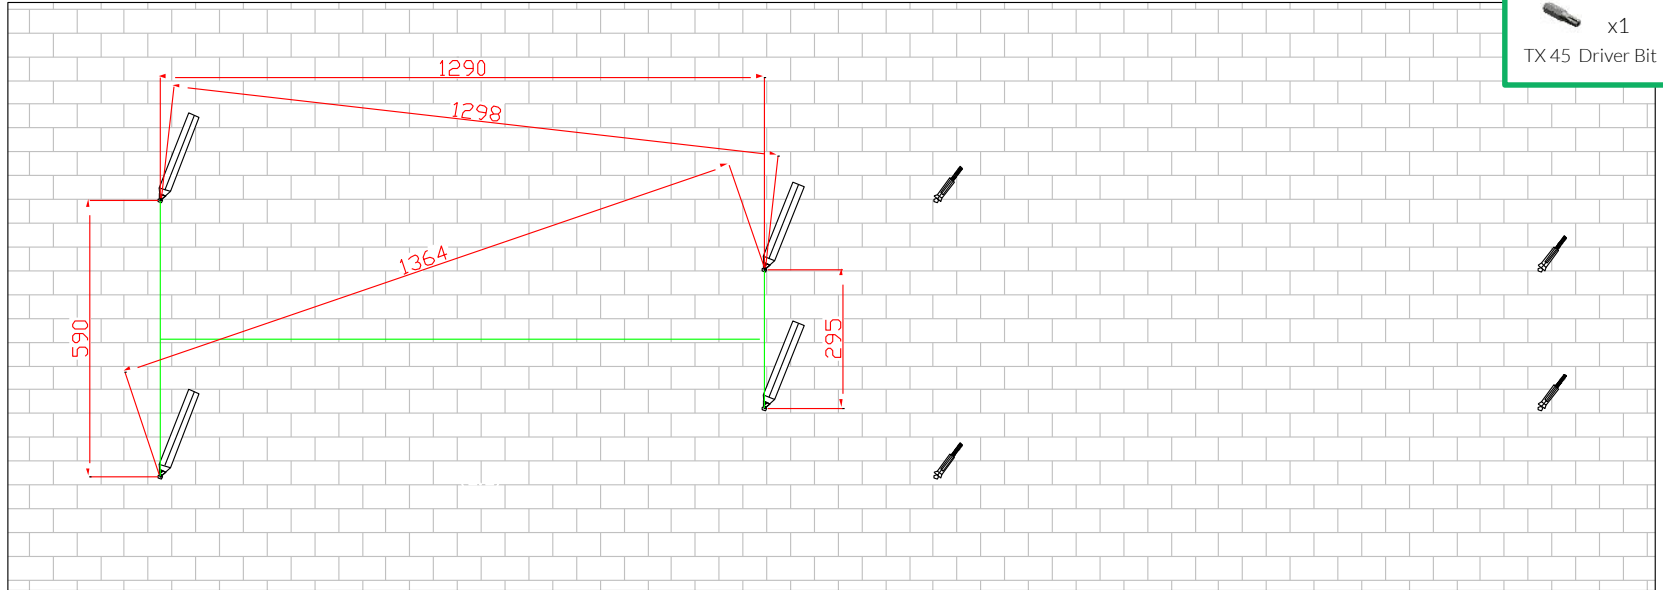


### 2. Drill holes .

### Tools:

x1  
TX 45 Driver Bit

### 3. Fit wall mounts .

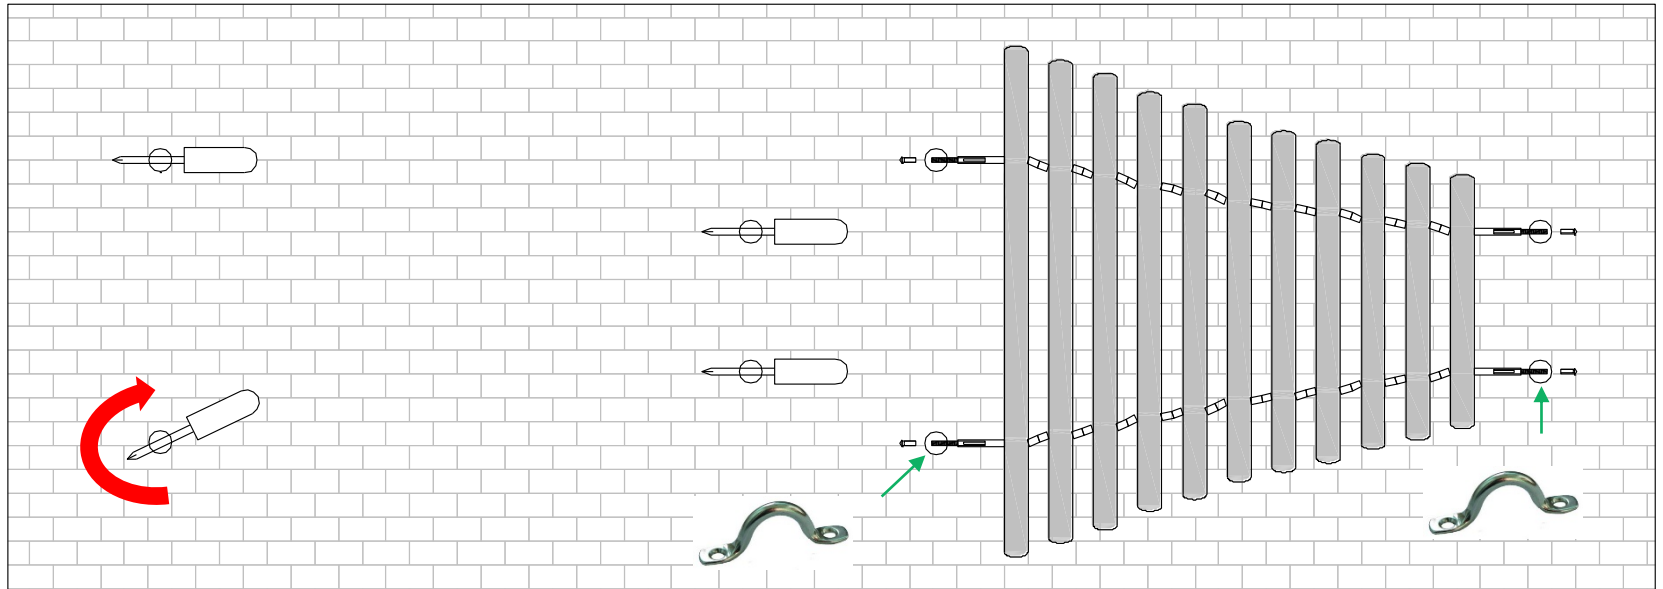

### 4. Attach notes .

Saddle Straps should be attached to the bottom wall mounts to attach the beaters