



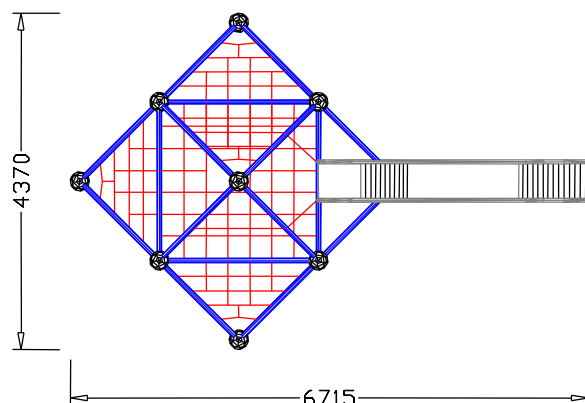

Product Specification

Product Family	: PicolinoPlaypoints
Product name	: Net House.02
Item number	: 90.130.003
Children's age	: 3+
Fall Height (EN1176)	: 1.49 m (4'-11")
Dimensions: Length, width, height	: 6.8 X 4.4 X 3.1 m (22'-1" x 14'-5" x 10')
Protective Surfacing Area required (EN1176)	: 10.3 x 7.4 m
Protective Surfacing Area required (ASTM 1487)	: 10.7 x 8.1 m (35'-1" x 26'-5")
Minimum space required	: EN1176: 43.3 m ² / ASTM 1487: 54.8 m ²
Number of foundations	: 5
Concrete Volume C20/25 (3.000 psi)	: 0.71 m ³
Number of skilled installers required	: 2
Installation time without foundation	: 7 hours
Dimensions of largest part	: 0.6 x 0.7 x 4.0 m
Weight of heaviest part	: 100 kg
Freight volume	: 3.3 m ³
Gross weight	: 450 kg
Spare part guarantee	: Lifelong
Certificate according to EN 1176	: No.: AL 99 08 10256 174 – TÜV Product Service

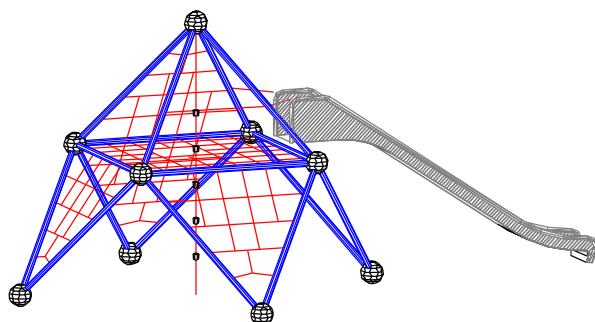

Parts list (a doc. file can be provided upon request)

A Mars structure arranged as a nethouse. Surface nets, a slide and a climbing rope are attached. Comes with a 10 year limited warranty.

Members:	Frameworkx -steel pipes, \varnothing 60.3 mm (2 3/8"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.
Nodes:	Frameworkx -aluminum ball connectors, \varnothing 250mm (9-13/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system, securely closed with durable ebonite caps.
Ropes:	U-Rope -round strand ropes with steel cores, \varnothing 16mm (5/8") with galvanized wires, external strands are covered with non-abrasive UV-resistant Polyester-yarn. Maximum breaking stress 115kN.
Spatial netting:	Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required).
Slide, narrow type:	Slide made from corrosion resistant steel, grade AISI304 (DIN 1.4301). Start height: 1500mm, width: 500mm. Equipped with aluminium BSF slide clamps.
Climbing rope:	\varnothing 21mm vertical rope with rubber cylinders clamped at 250-300mm intervals to assist climbing. The top of the rope is connected to the top most ball, while the end of the rope is connected to the ground with a hot-dipped galvanized steel anchor plate.