Cosmo.06 – Product Specification

Cosmo – The first totally round rope play structure

The innovative space structure offers exciting play options never before experienced. Cosmo is a whole new round of fun in play equipment: The first totally round rope play structure has arrived.

Apart from the basic system, Cosmo stands out due to its many freely selectable add-ons and diverse play activities. This gives the Cosmo an advantage over several rounds compared to conventional climbing frames.

In 2008 Cosmo received the prestigious “Red Dot” design award for excellent design quality.

At a glance.

Product Family:	**Cosmo**	Number of Foundations:	**8 pc.**
Item Number:	**90.112.060**	Concrete Volume C20/C25:	**2.4 m³ (84.8 ft³)**
Children’s Age:	**5+**	Number of skilled installers required:	**3**
Fall Height (DIN EN 1176):	**2.30 m (7‘-7“)**	Installation Time without foundation:	**9 hours**
Length x Width x Height:	**8.6 m x 7.2 m x 3.8 m (28‘-0“ x 23‘-8“ x 12‘-4“)**	Dimensions of largest part:	**0.1 m x 1.3 m x 4.6 m (0‘-4“ x 4‘-3“ x 15‘-1“)**
Protective Surfacing Area (DIN EN 1176):	**10.4 m x 11.6 m**	Weight of heaviest part:	**105 kg (231.5 lbs)**
Protective Surfacing Area (ASTM 1487):	**12.2 m x 11.1 m (40‘-0“ x 36‘-5“)**	Shipping Volume:	**4.0 m³ (141.3 ft³)**
		Spare part guarantee:	**Lifelong**
Minimum space required DIN EN 1176:	**80.9 m²**	Certificate according to DIN EN 1176:	**No.: Z1A 14 07 10256 221 TÜV Product Service**
Minimum space required ASTM 1487:	**88.9 m² (956.9 sf)**		

BerlinerSeilfabrik

Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

bsf@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Cosmo.06 – Product Specification

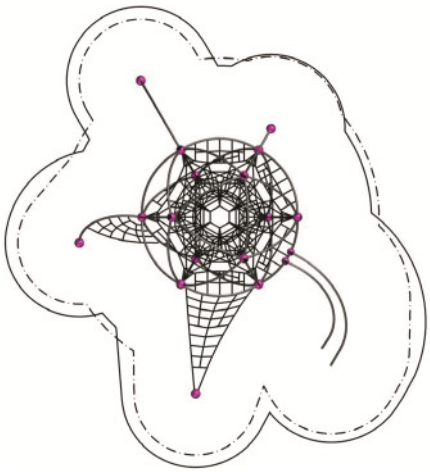

M 1:200

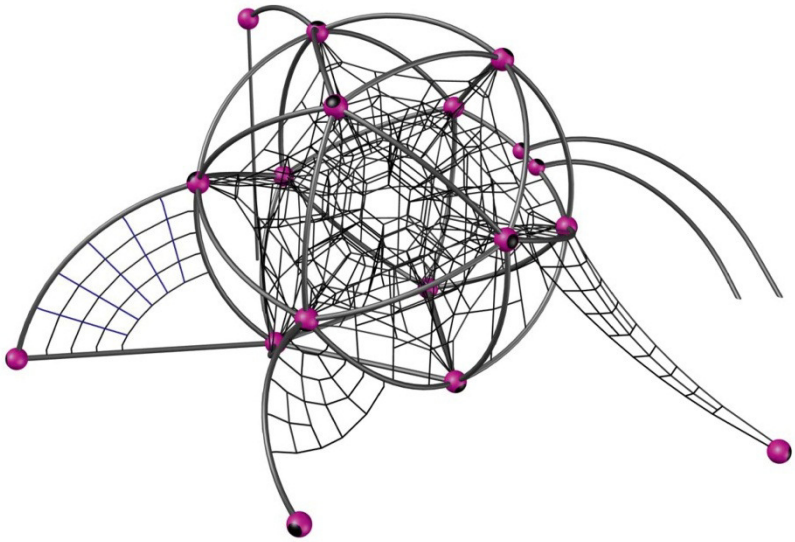

Technical Data.

The following text can also be used for tenders.

- Cosmo
- Access net
- Net ramp
- Net wall
- Sliding pole
- Banister

Tube framework:
Curved stainless steel tubes; Ø 60.3 mm (2 3/8'')

Nodes:
Frameworx-aluminum ball connectors; Ø 250 mm (9-13/16''); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:
U-Rope®-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene): Ø 18 mm (11/16")

Spacial netting:
Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)

Net ramp, net wall, access net:
Made of U-Rope, mesh size minimum 250 x 250 mm (9-4/5" x 9-4/5"); rope crossing points localized with durable, drop forged aluminum-ball-knots, net mounted with aluminum tube clamps on stainless steel tubes (net ramp and net wall), Ø 2 3/8'' (60.3 mm); grounded with Frameworx-aluminum ball connector, Ø 9 13/16'' (250 mm) and foundation-tube

Sliding pole:
Curved stainless steel pipe: Ø 60.3 mm (2-3/8''), wall thickness 2.9 mm; Frameworx-aluminum ball connectors, Ø 250 mm (9-13/16''); stainless steel sliding pole Ø 40 mm (1-3/5") wall thickness 5 mm (3/16'')

Curved banister:
Curved stainless steel pipes; Ø 60.3 mm (2 3/8'') wall thickness 2.9 mm; connected to the main structure with 2 aluminum ball connectors Ø 200mm (7-9/10'')

BerlinerSeilfabrik

Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

bsf@berliner-seilfabrik.com
www.berliner-seilfabrik.com