



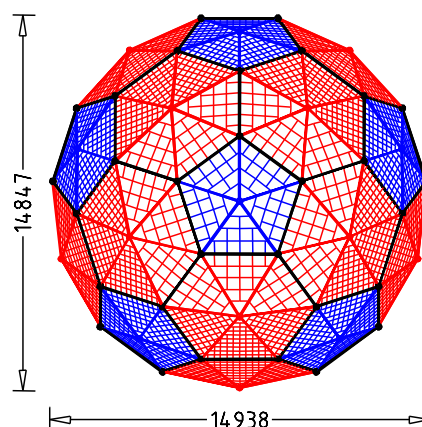

# Product Specification

**Product Family** : GeosPlayUnivers  
**Product name** : Geodom.01  
**Item number** : 95.130.301  
**Children's age** : 8+  
**Fall Height (EN1176)** : 3.0 m (9'-11")  
**Dimensions: Length, width, height** : 15.0 x 14.9 x 6.5 m (49'-1" x 48'-9" x 21'-3")  
**Protective Surfacing Area required (EN1176)** : 18.1 x 18.1 m  
**Protective Surfacing Area required (ASTM 1487)** : 18.7 x 18.7 m (61'-4" x 61'-4")  
**Minimum space required** : **EN1176:** 256 m<sup>2</sup> / **ASTM 1487:** 274 m<sup>2</sup>  
**Number of foundations** : 15  
**Concrete Volume C20/25 (3.000 psi)** : 6.1 m<sup>3</sup>  
**Number of skilled installers needed** : 3  
**Installation time without foundation** : 32 hours  
**Dimensions of largest part** : 2.5 x 2.0 x 1.5 m  
**Weight of heaviest part** : 600 kg  
**Freight volume** : 21.0 m<sup>3</sup>  
**Gross weight** : 6000 kg  
**Spare part guarantee** : Lifelong  
**Certificate according to EN 1176** : No.: Z2 05 10 10256 040 – TÜV Product Service

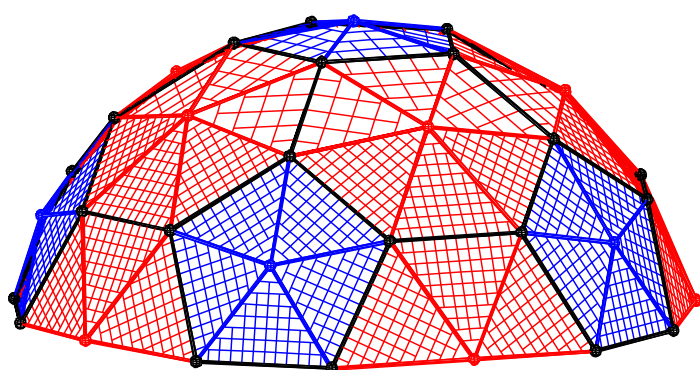

- Members: **Frameworkx**-steel pipes, Ø 60.3 mm (2 3/8"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.
- Nodes: **Frameworkx**-aluminum ball connectors, Ø 250mm (9-13/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process; secured with durable ebonite caps.
- Ropes: **U-Rope**-round strand ropes with steel cores, Ø 16mm (5/8") – unless otherwise noted; galvanized wires, external strands covered with non-abrasive UV-resistant Polyester-yarn.
- Netting: Rope crossing points localized with hydraulically pressed ball knots comprised of corrosion resistant forged alloyed aluminium (no plastic).