



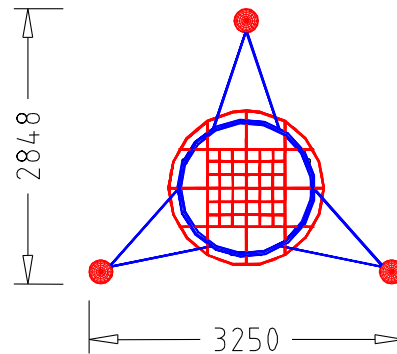

BerlinerSeilfabrik

# Product Specification

**Product Family** : PicolinoPlaypoints  
**Product name** : Wespennest..120  
**Item number** : 95.200.120  
**Children's age** : 5+  
**Fall Height (EN1176)** : 2.5 m (8'-3")  
**Dimensions: Length, width, height** : 3.2 x 2.8 x 3.8 m (10'-6" x 9'-2" x 12'-3")  
**Protective Surfacing Area required (EN1176)** : 6.3 x 6.4 m  
**Protective Surfacing Area required (ASTM 1487)** : 7.0 x 6.6 m (22'-8" x 21'-5")  
**Minimum space required** : **EN1176:** 30.0 m<sup>2</sup> / **ASTM 1487:** 32.0 m<sup>2</sup>  
**Number of foundations** : 3  
**Concrete Volume C20/25 (3.000 psi)** : 2.1 m<sup>3</sup>  
**Number of skilled installers required** : 2  
**Installation time without foundation** : 3 hours  
**Dimensions of largest part** : Ø 0.14 x 4.5 m  
**Weight of heaviest part** : 140 kg  
**Freight volume** : 4.3 m<sup>3</sup>  
**Gross weight** : 700 kg  
**Spare part guarantee** : Lifelong  
**Certificate according to EN 1176** : No.: Z2 05 10 10256 043 – TÜV Product Service

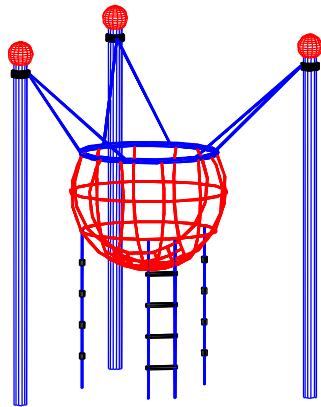

A net ball with a steel ring suspended from cables. Suspension cables are connected to three steel posts. Also includes two climbing ropes and one rope ladder to encourage access.

Steel posts:	Steel pipes Ø 133mm (5 1/4"), wall thickness 10mm (3/8"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.
Mast node:	<b>Frameworkx</b> -aluminum ball connector, Ø 250mm (9-13/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process
Steel ring:	Formed <b>Frameworkx</b> -steel pipe, Ø 48.3 mm (1 7/8"); wall thickness 3.25mm, anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.
Suspension ropes:	<b>U-Rope</b> -round strand ropes with steel cores, Ø 16mm (5/8") with galvanized wires, external strands covered with non-abrasive UV-resistant Polyester-yarn;
Net ball:	The circular ropes feature a specialised spring steel core allowing the ball to maintain a spherical shape, Ø 16mm (5/8"), external strands are covered with non-abrasive UV-resistant Polyester-yarn



BerlinerSeilfabrik

## Product Specification

Rope ladder:	Width 290mm (11-7/16"), distance between rungs 250-300mm (9-13/16" to 11-13/16"), rungs comprised of American ash (alternatively Nylon 6.6)
Climbing ropes:	Rope $\varnothing$ 21mm (13/16"), with worked-in ebonite cylinders, distance between cylinders 250-300mm (9-13/16" to 11-13/16")