

SANDBOX - SQUARE

PRODUCT COMPOSITION


Rubber granules, PUR binder, lightweight concrete

COLOUR COMBINATION

Full colour range available on request

COLOUR STABILITY

Maximum of 3 on the grey scale

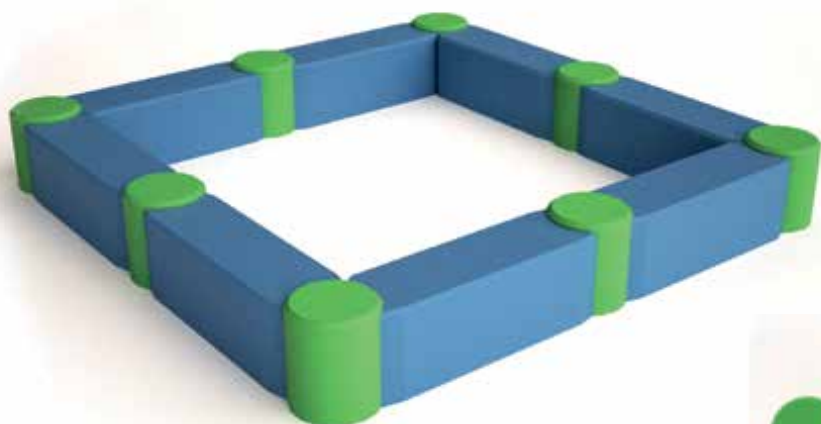

SAFETY SURFACE

No safety area required (according to EN1177)

PRODUCT SAFETY

Certified according to EN1176

INSTALLATION



The product is installed onto a concrete foundation

PACKAGING

Wrapped in plastic and delivered on two pallets 1650 x 2100mm

STORAGE

In original packaging on a pallet in temperatures between - 40° C and 50° C

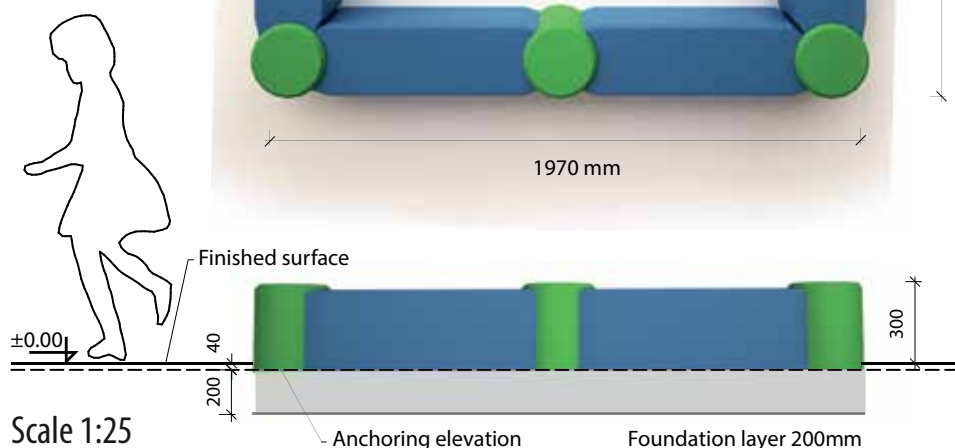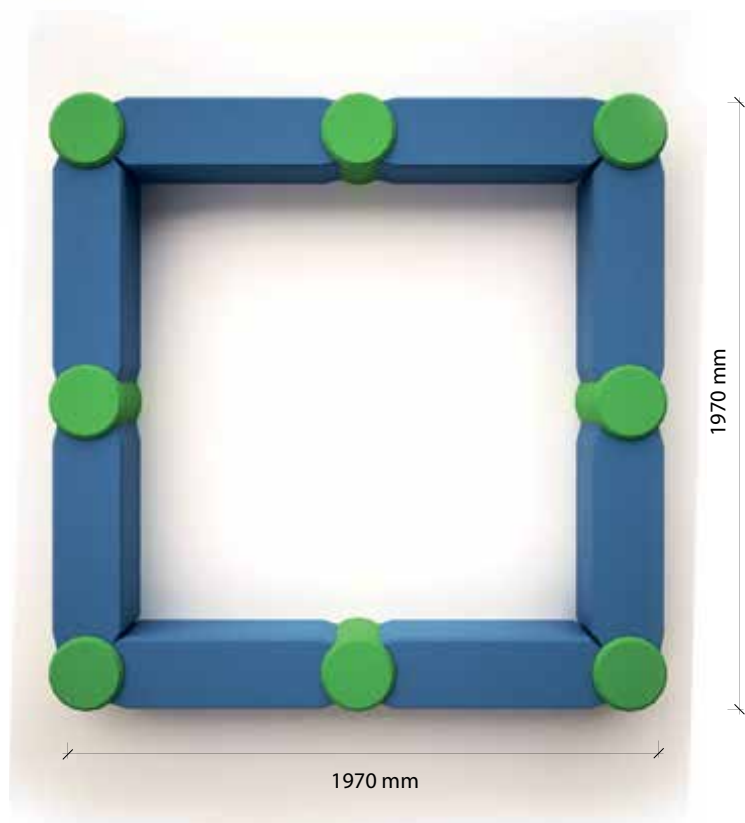

200 kg



300 mm

critical fall height



1 hr

assembly time



2 - 8 yrs

users' age



1970 x 1970 x 300 mm

dimensions

UNO UNIQA GROUP A/S

Vordingborgvej 35
DK-4600 Køge

Email: info@uno.dk / info@uniqa.dk
Tlf.: +45 70 20 60 70 / +45 70 21 50 90

UNO
group
UNIQA