

SANDBOX - OCTAGON

PRODUCT COMPOSITION

Rubber granules, PUR binder, lightweight concrete

COLOUR COMBINATION

Full colour range available on request

COLOUR STABILITY

Maximum of 3 on the grey scale



SAFETY SURFACE

No safety area required (according to EN1177)

PRODUCT SAFETY

Certified according to EN1176

INSTALLATION

The product is installed onto a concrete foundation



PACKAGING


Wrapped in plastic and delivered on two pallets 1650 x 2100mm

STORAGE

In original packaging on a pallet in temperatures between - 40° C and 50° C

Scale 1:50

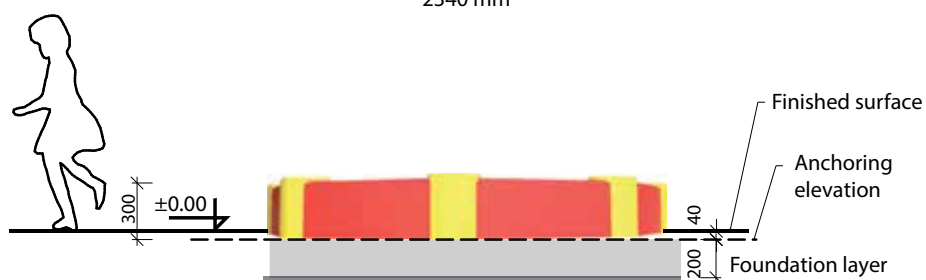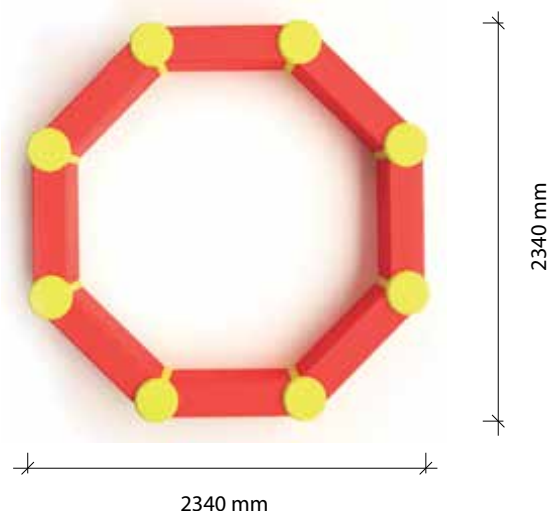

 200 kg weight	 300 mm critical fall height	 1 hr assembly time	 2 - 8 yrs users' age	 2340 x 2340 x 300 mm dimensions
---	--	---	---	--

UNO UNIQA GROUP A/S

Vordingborgvej 35
DK-4600 Køge

Email: info@uno.dk / info@uniqa.dk
Tlf.: +45 70 20 60 70 / +45 70 21 50 90

UNO
group
UNIQA