

HEDGEHOG

PRODUCT COMPOSITION

Rubber granules, PUR binder, vandal-resistant fibreglass shell, metal parts

COLOUR COMBINATION

Standard: brown / ochre / yellow, other combinations on request

COLOUR STABILITY

Maximum of 3 on the grey scale



SAFETY SURFACE

Safety rubber surface in the area of 1500mm around the product (according to EN1177)

PRODUCT SAFETY

Certified according to EN1176

INSTALLATION



The product is installed onto a concrete foundation

PACKAGING

Wrapped in plastic and delivered on a pallet 1650 x 2100mm

STORAGE

In original packaging on a pallet in temperatures between - 40° C and 50° C

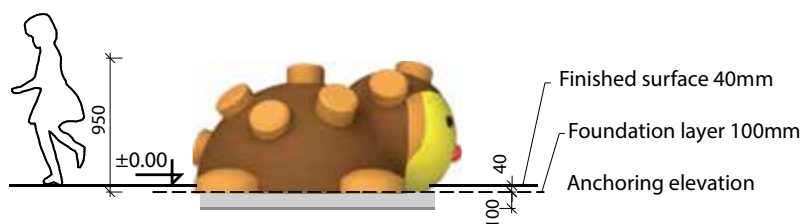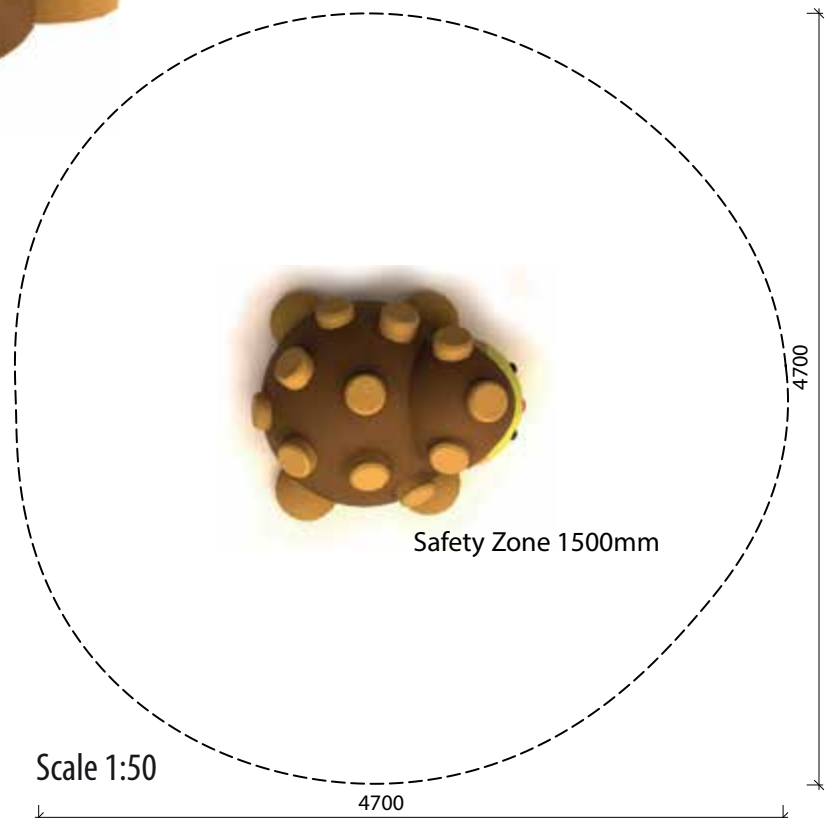

 180 kg weight	 950 mm critical fall height	 1 hr assembly time	 2 - 8 yrs users' age	 1600 x 1950 x 950 mm dimensions
---	--	---	---	---

UNO UNIQA GROUP A/S

Vordingborgvej 35
DK-4600 Køge

Email: info@uno.dk / info@uniqa.dk
Tlf.: +45 70 20 60 70 / +45 70 21 50 90

UNO
group
UNIQA