

# CAT

## PRODUCT COMPOSITION

Rubber granules, PUR binder, vandal-resistant fibreglass shell, metal parts

## COLOUR COMBINATION

Standard: brown / ochre / yellow, other combinations on request

## COLOUR STABILITY

Maximum of 3 on the grey scale



## SAFETY SURFACE

Safety rubber surface in the area of 1500mm around the product (according to EN1177)

## PRODUCT SAFETY

Certified according to EN1176

## INSTALLATION



The product is installed onto a concrete foundation

## PACKAGING

Wrapped in plastic and delivered on a pallet  
1650 x 2100mm

## STORAGE

In original packaging on a pallet in temperatures  
between - 40° C and 50° C

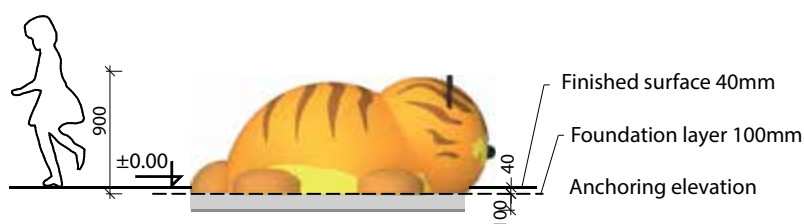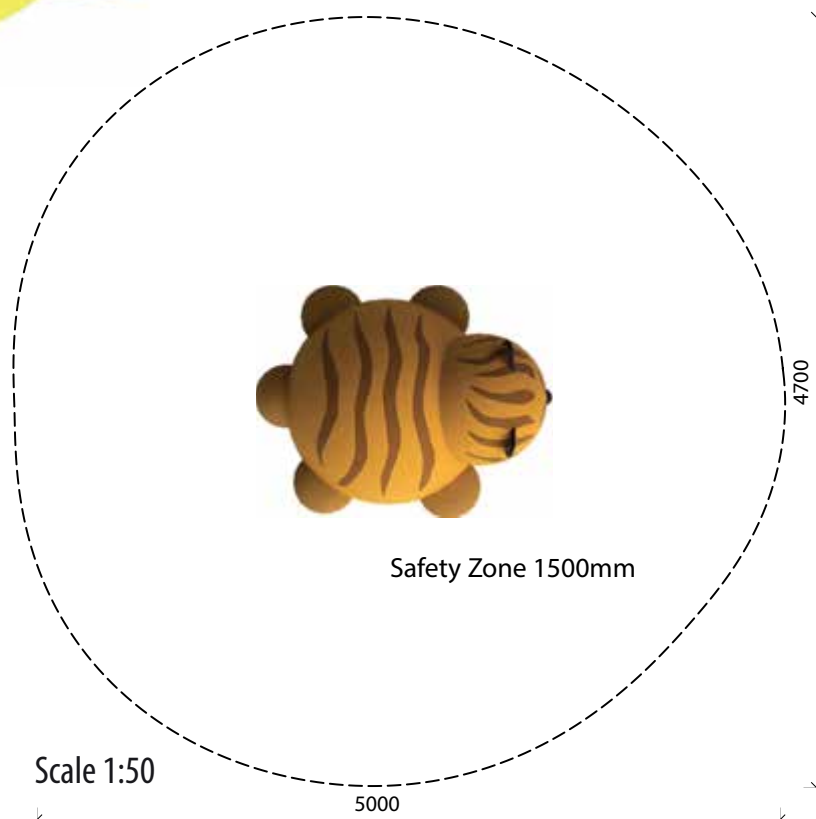

180 kg

weight



900 mm

critical fall height



1 hr

assembly time



2 - 8 yrs

users' age



1600 x 1800 x 900 mm

dimensions

## UNO UNIQA GROUP A/S

Vordingborgvej 35  
DK-4600 Køge

Email: [info@uno.dk](mailto:info@uno.dk) / [info@uniqa.dk](mailto:info@uniqa.dk)  
Tlf.: +45 70 20 60 70 / +45 70 21 50 90

UNO  
group  
UNIQA