MINI CAT

PRODUCT COMPOSITION

Rubber granules, PUR binder, vandal-resistant fibreglass shell, metal parts

COLOUR COMBINATION

Standard: brown / beige / yellow, other combinations on request

COLOUR STABILITY

Maximum of 3 on the grey scale



SAFETY SURFACE

synthetic surface / gravel / sand / wood chips / bark / turf in the area 1500mm around the product (according to EN1177)

PRODUCT SAFETY

Certified according to EN1176

INSTALLATION


The product is installed onto a concrete foundation


PACKAGING

Wrapped in plastic and delivered on a pallet 1000 x 1300mm

STORAGE

In original packaging on a pallet in temperatures between – 40° C and 50° C

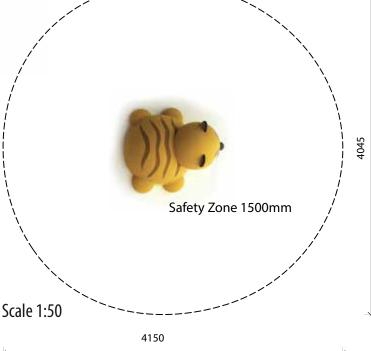

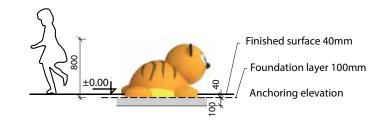



\$\frac{1}{2}\text{\$800 mm}\$ critical fall height







UNO UNIQA GROUP A/S

Vordingborgvej 35 DK-4600 Køge

Email: info@uno.dk / info@uniqa.dk Tlf.: +45 70 20 60 70 / +45 70 21 50 90

