

MINI OCTOPUS

PRODUCT COMPOSITION

Rubber granules, PUR binder, vandal-resistant fibreglass shell, metal parts

COLOUR COMBINATION

Standard: blue / green / white / black, other combinations on request

COLOUR STABILITY

Maximum of 3 on the grey scale



SAFETY SURFACE

Safety rubber surface in the area 1500mm around the product (according to EN1177)

PRODUCT SAFETY

Certified according to EN1176

INSTALLATION



The product is installed onto a concrete foundation

PACKAGING

Wrapped in plastic and delivered on a pallet
1650 x 2100mm

STORAGE

In original packaging on a pallet in temperatures
between - 40° C and 50° C

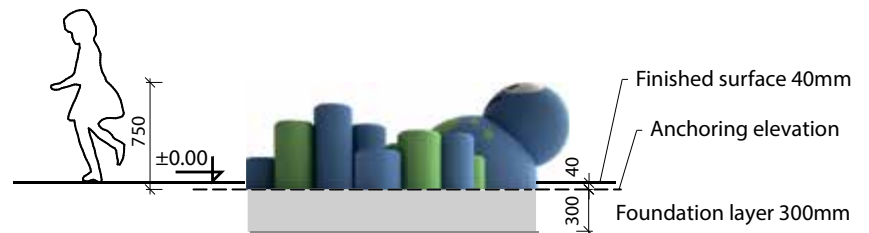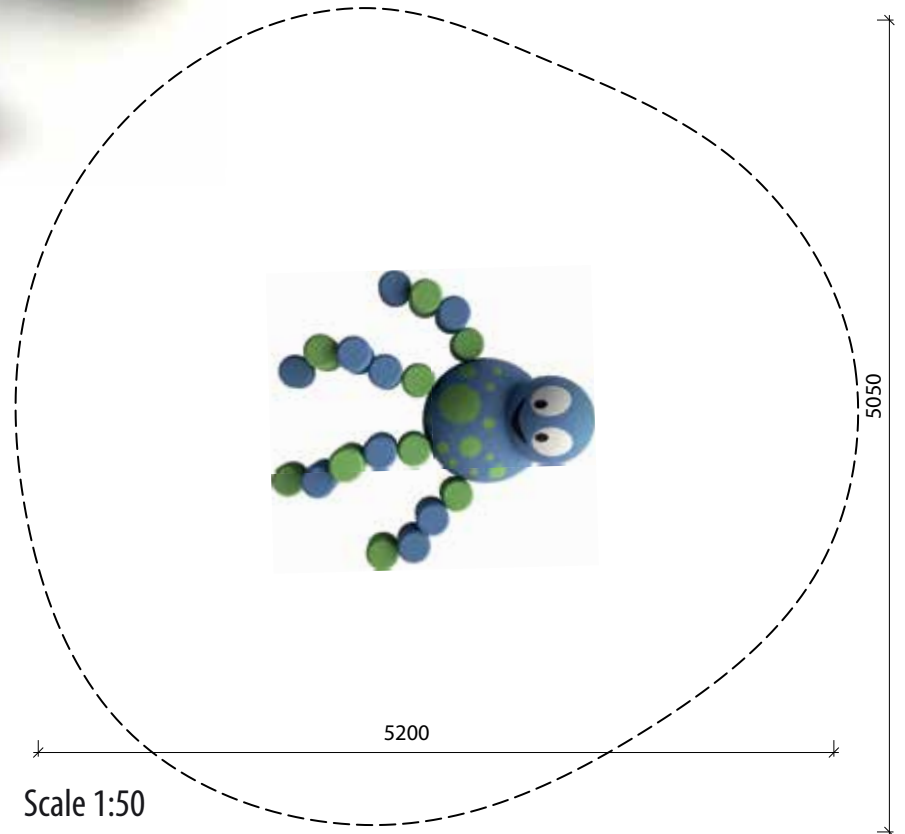

320 kg

weight



750 mm

critical fall height



4 hr

assembly time



2 - 8 yrs

users' age



2050 x 2200 x 750 mm

dimensions

UNO UNIQA GROUP A/S

Vordingborgvej 35
DK-4600 Køge

Email: info@uno.dk / info@uniqa.dk
Tlf.: +45 70 20 60 70 / +45 70 21 50 90

UNO
group
UNIQA