
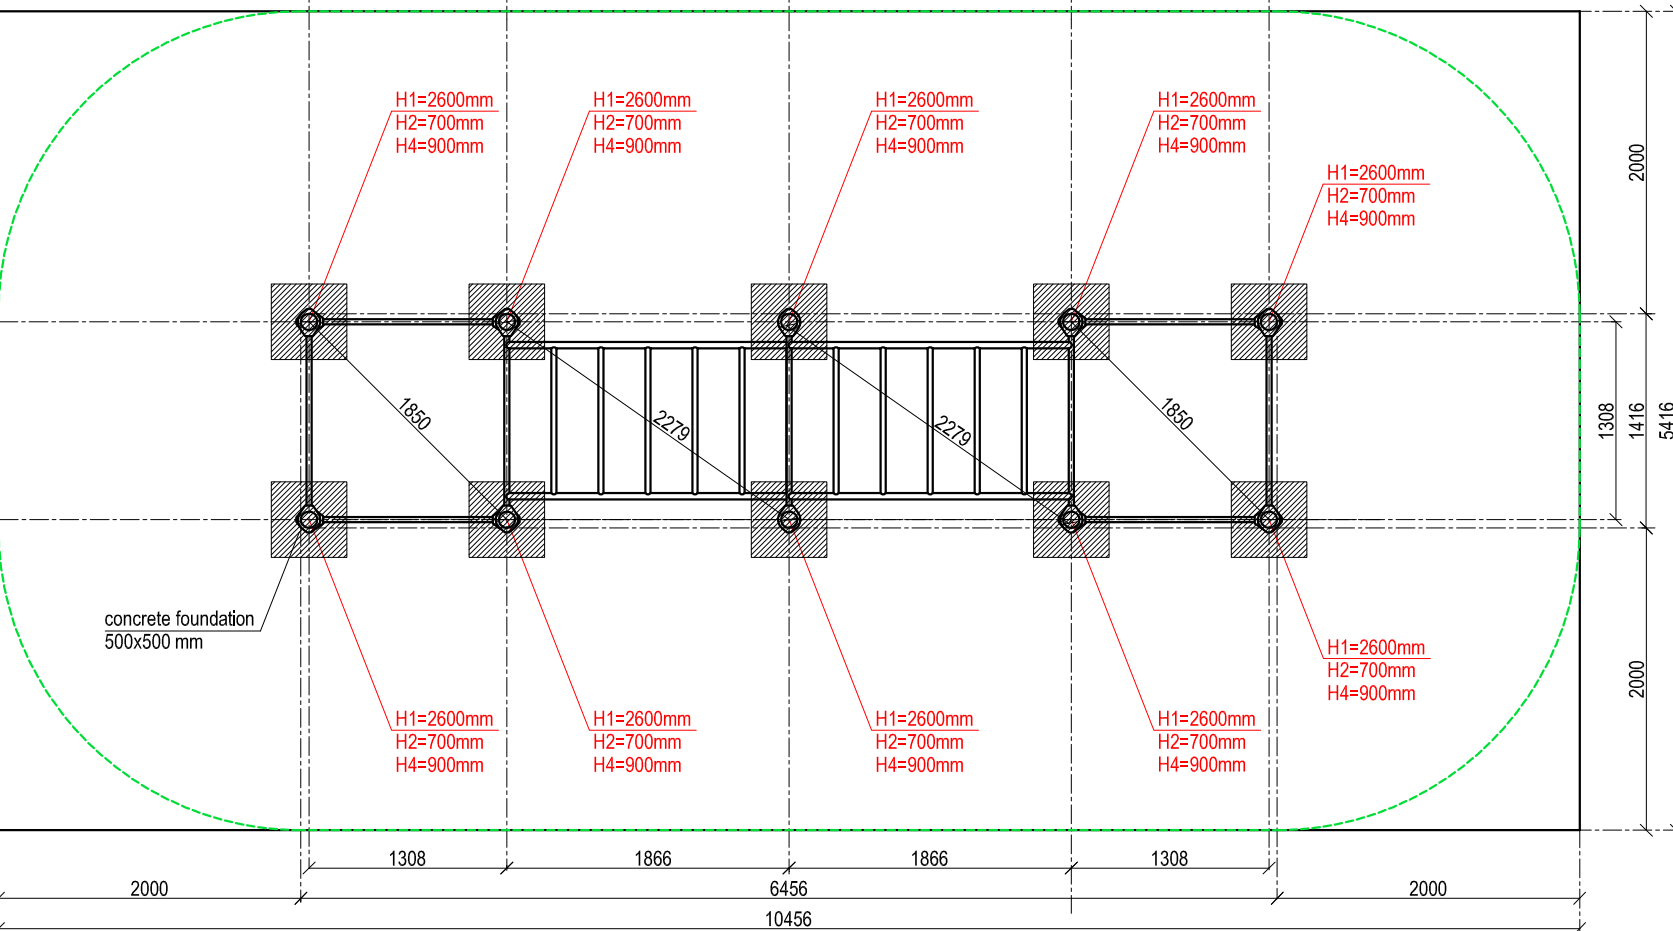
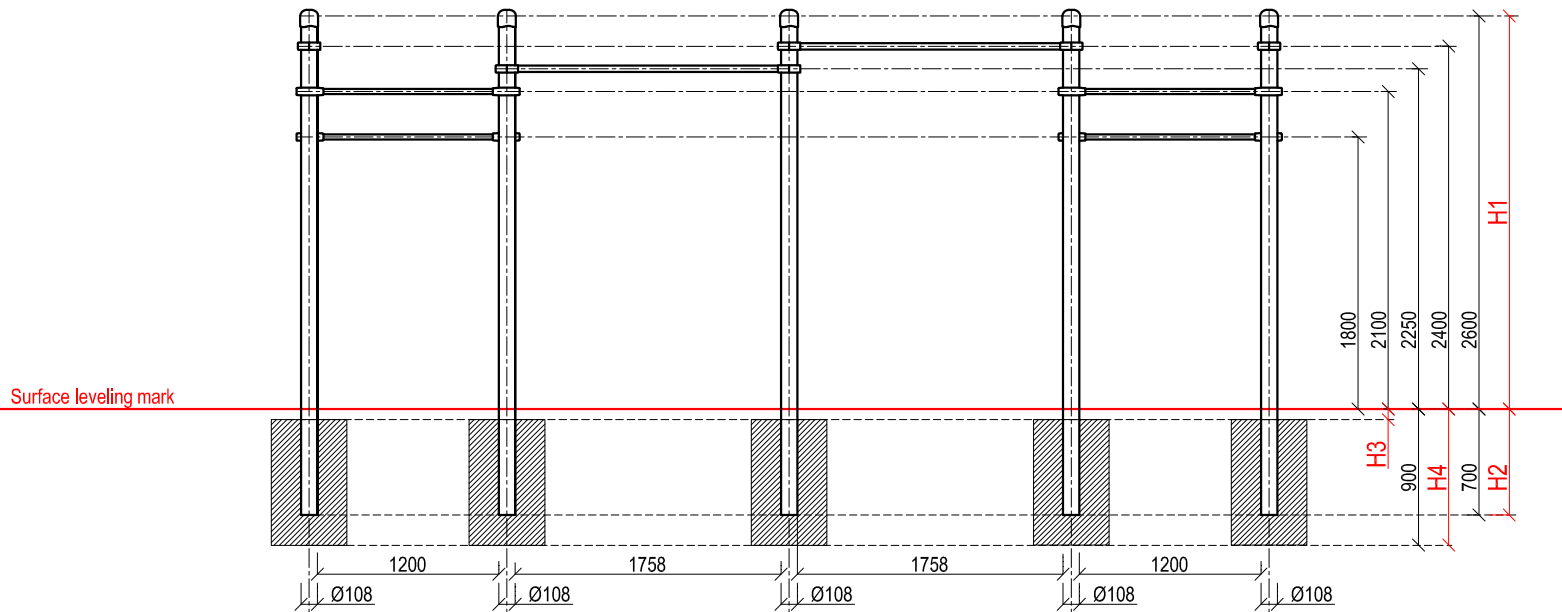



SCALE 1:50



LTD "KENGURU PRO"
 Address: Ezera street 21-28, Riga, Latvia, LV-1034
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-003

Classic two-level monkey bars and 6 pull-up bars

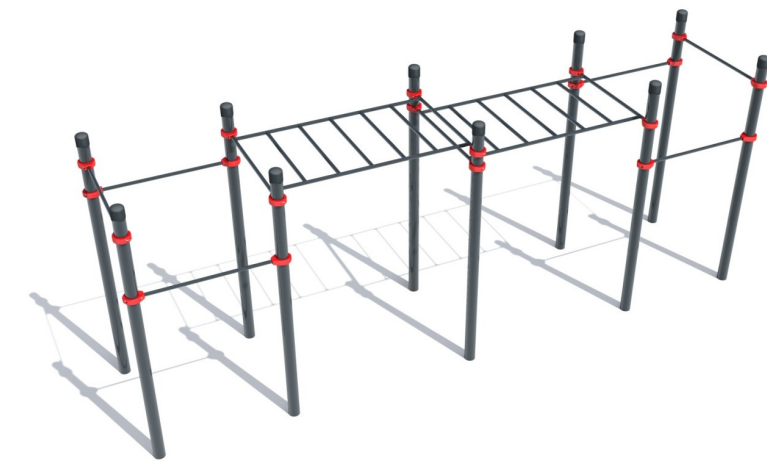

Complex consists of 10 vertical columns with the height of 2600 mm and 6 crossbars with the length of 1200 mm, crossbars are fixed to vertical columns with collars. The height of pull-up bars- 2 pcs. 1800 mm, 2 pcs. 2100 mm and 2 pcs. 2400 mm. Monkey bars consist of 2 sections and are fixed in different levels: 2400 mm and 2250 mm. The length of each section is 1900 mm and is fixed to vertical backcup columns with collars. Weight 434.4 kg.

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-003 Classic two-level monkey bars and 6 pull-up bars				Technical information	
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	1416 mm
H3		H3		height:	2650 mm
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	length:	6456 mm
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	largest part:	3350 mm
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	weight:	434.4 kg
70 mm	> 2.1.....2.5 m			floor space required	5416 x 10456 mm
				pipe measurements:	diameter:
					108 mm
					42.4 mm
					33.7 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10
				max. free fall height:	< 2400 mm
				possible underground see	DIN 79000:2012-05 Tab.2 or installation instructions
				user age:	children under 14 years only under surveillance of parents
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.