
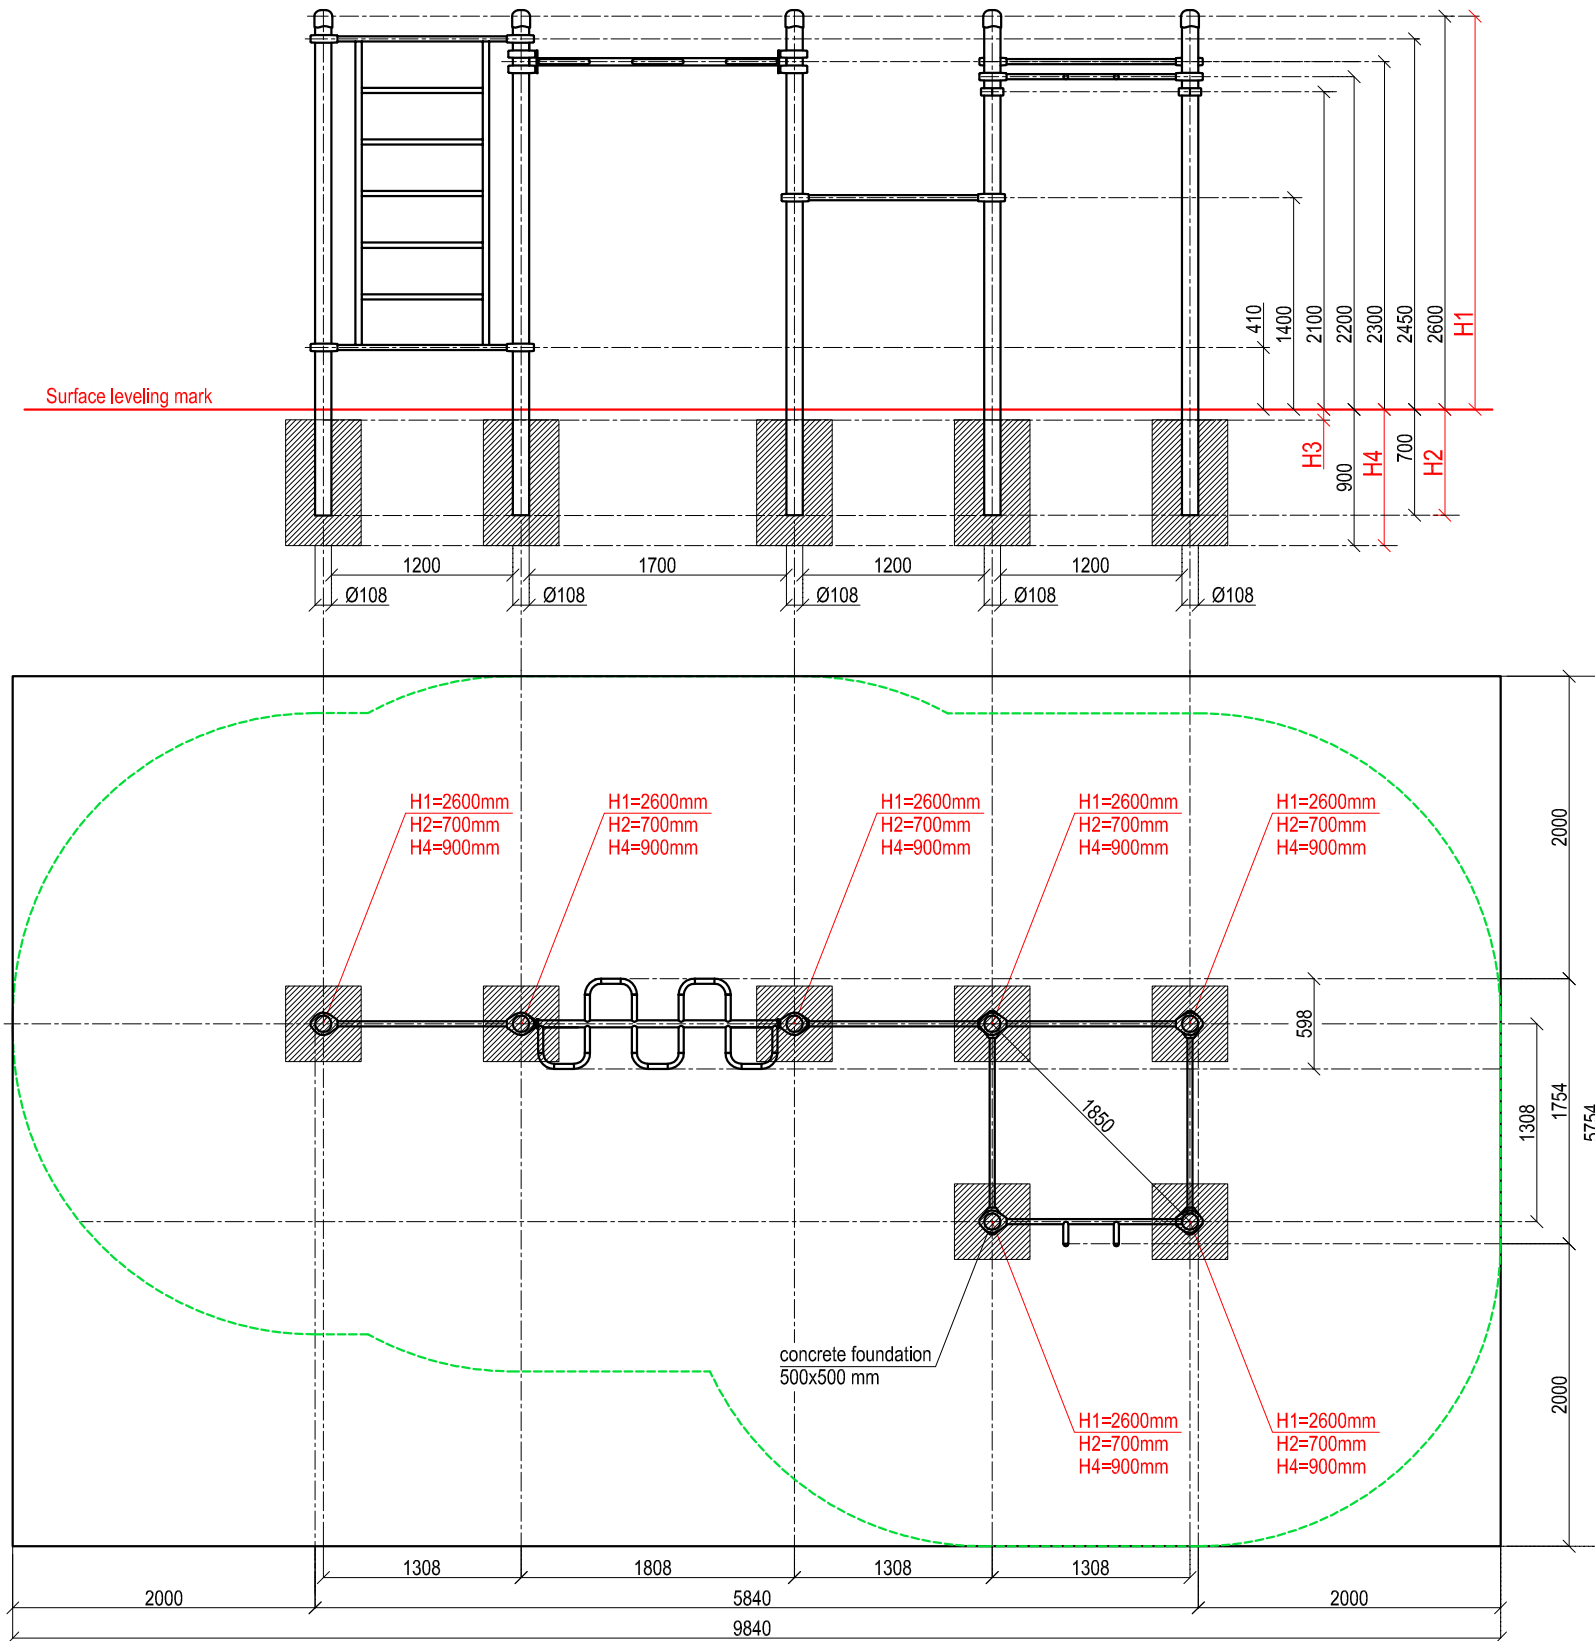



SCALE 1:50



LTD "KENGURU PRO"
 Address: Ezera street 21-28, Riga, Latvia, LV-1034
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-004

Monkey bars - snake, wall bars, four pull-up bars of classic hold and one pull-up bar with hold unclassic

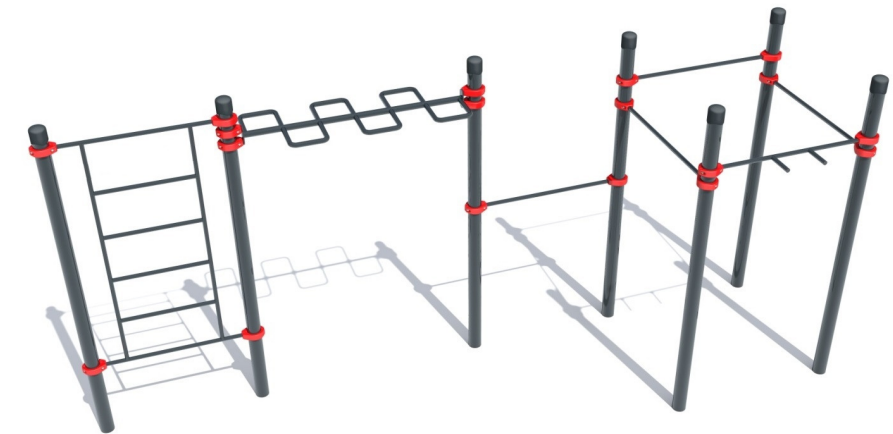

Complex consists of 7 vertical columns with the height of 2600 mm, 4 crossbars for pull-ups, 1 Pull-up bar for unclassic pull-ups, 1 Monkey bar- snake and 1 Wall bars . The length of crossbars is 1200 mm. Crossbars are fixed with collars to the vertical columns at the heights of 1400mm, 2100 mm, 2200 mm and 2300 mm. Monkey bars - snake is 1700 mm long and fixed with collars to the vertical columns at the height of 2300 mm.

Weight 320.8 kg

Installation instructions:

- Choose a suitable underground for the unit **(see page 2, table 2)!**
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-004 Monkey bars - snake, wall bars, four pull-up bars of classic hold and one pull-up bar with hold unclassic hold				Technical information				
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	1754 mm			
H3	Drop height	H3	Drop height	height:	2650 mm			
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	length:	5840 mm			
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	largest part:	3350 mm			
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	weight:	320.8 kg			
70 mm	> 2.1.....2.5 m			floor space required	5754 x 9840 mm			
				pipe measurements:	diameter:	108 mm	wall thickness:	3.2 mm
						48.3 mm	3.2 mm	
						33.7 mm	3.2 mm	
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)			
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)			
				bolts for metal clamps	stainless steel, Pin Hex Button Head Security Screws M10			
				max. free fall height:	< 2400 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions		
				user age:	children under 14 years only under surveillance of parents			
				maximum user weight:	130 kg			
				certificates:	TÜV Rheinland InterCert Kft.			

