



SCALE 1:40

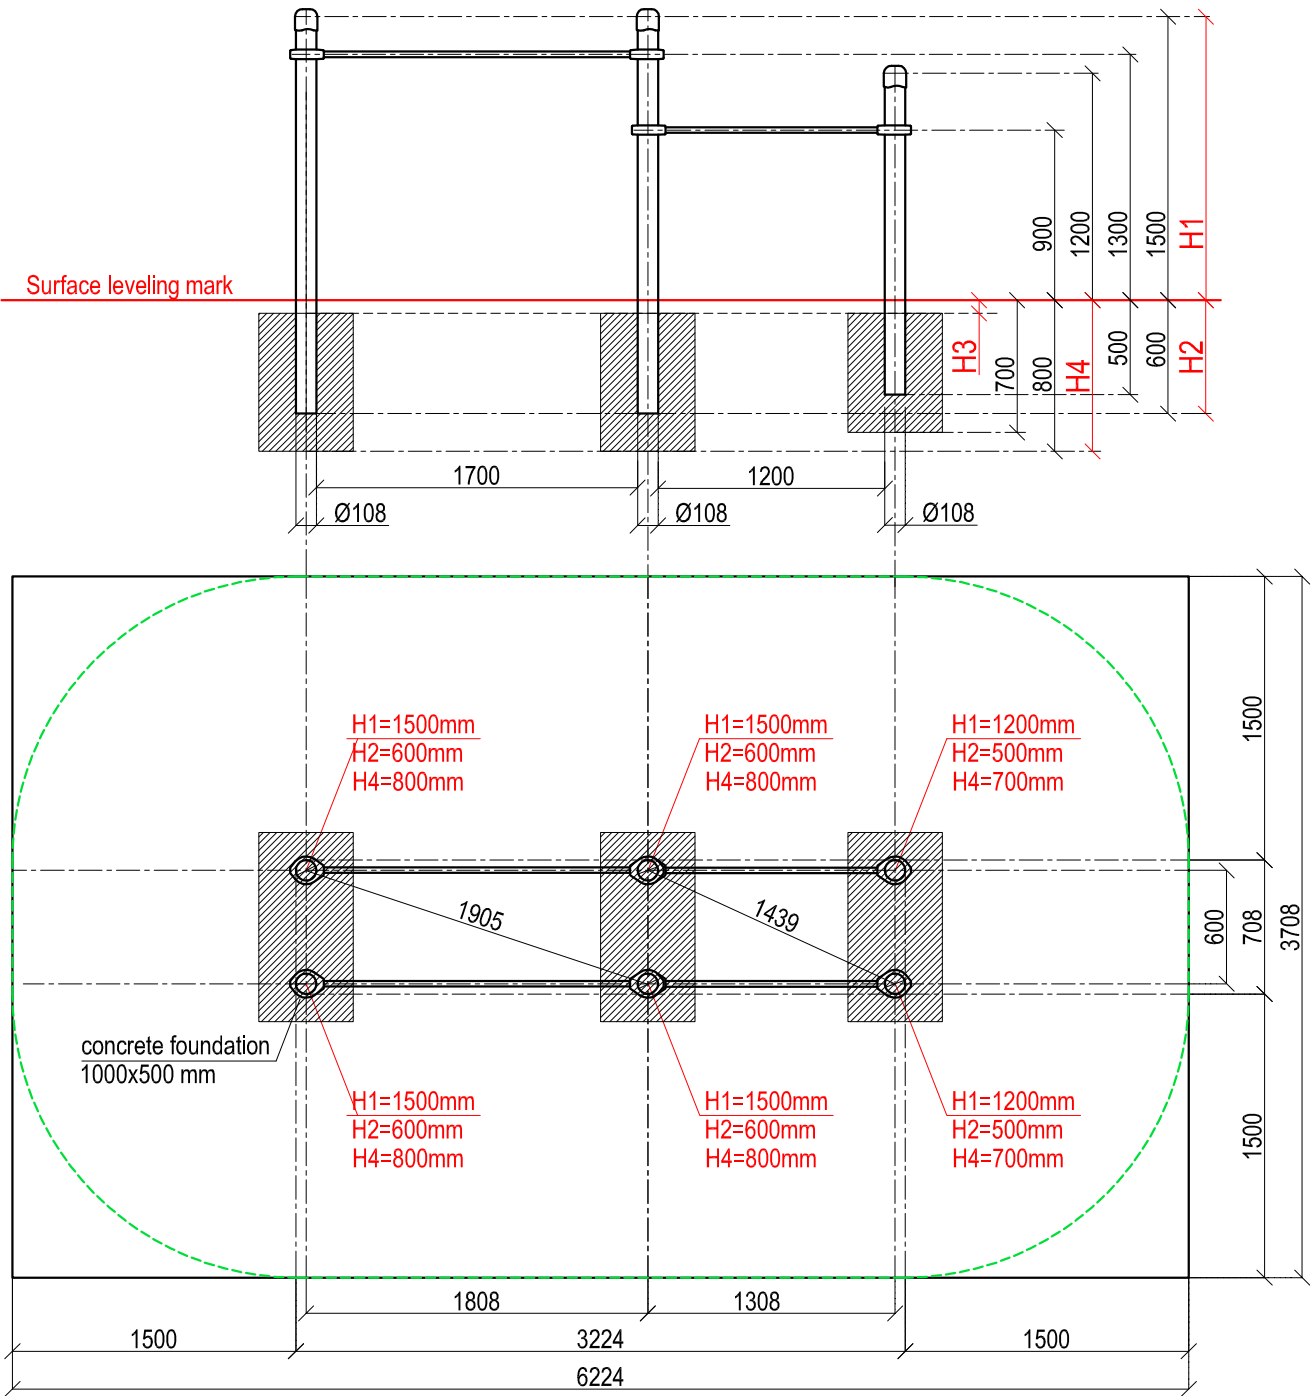

LTD "KENGURU PRO"
Address: Ezera street 21-28, Riga, Latvia, LV-1034
VAT Reg. No. 40103750152
Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

K-009

Double parallel bars for press-up with different levels

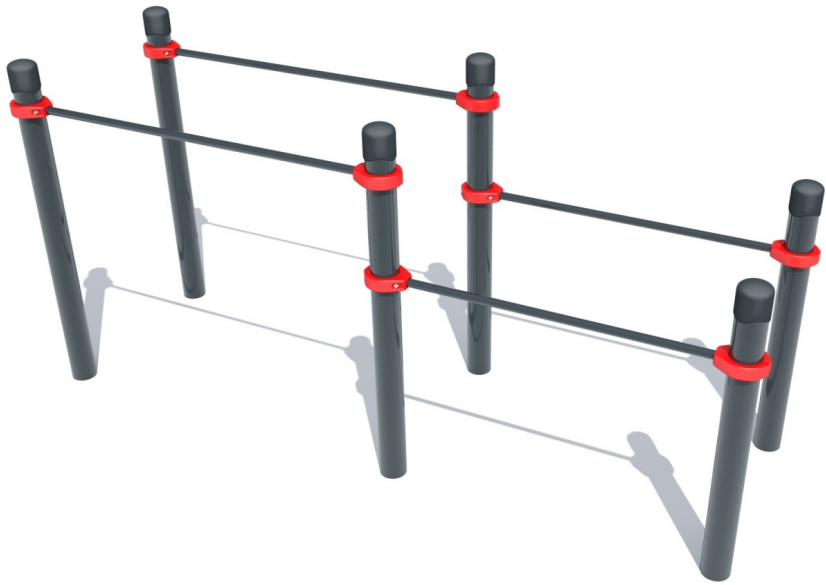

The complex consists of six backup columns at the height of 1200 mm - 2 pieces, 1500 mm- 4 pieces and horizontal crossbars: 1200 mm- 2 pieces, 1700 mm-2 pieces. The distance between vertical backup columns is 600 mm. Crossbars are fixed by means of collars at the height of 900 mm and 1300 mm from the foundation.
Weight 132 kg

Installation instructions:

- Choose a suitable underground for the unit (**see page 2, table 2!**)
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-009 Double parallel bars for press-up with different levels				Technical information		
Foundation when using Shock absorbing underground (syntethic – rubber granulates)		Beveling of foundation when using loose filling material		width:	708 mm	
				height:	1550 mm	
				length:	3224 mm	
				largest part:	2150 mm	
				weight:	132 kg	
				floor space required	3708 x 6224 mm	
				pipe measurements:	diameter:	wall thickness:
					108 mm	3.2 mm
					33.7 mm	3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)	
				bolts for metal clamps	stainless steel, Pin Hex Button Head Security Screws M10	
				max. free fall height:	< 1300 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user age:	children under 14 years only under surveillance of parents	
				maximum user weight:	130 kg	
				certificates:	TÜV Rheinland InterCert Kft.	