
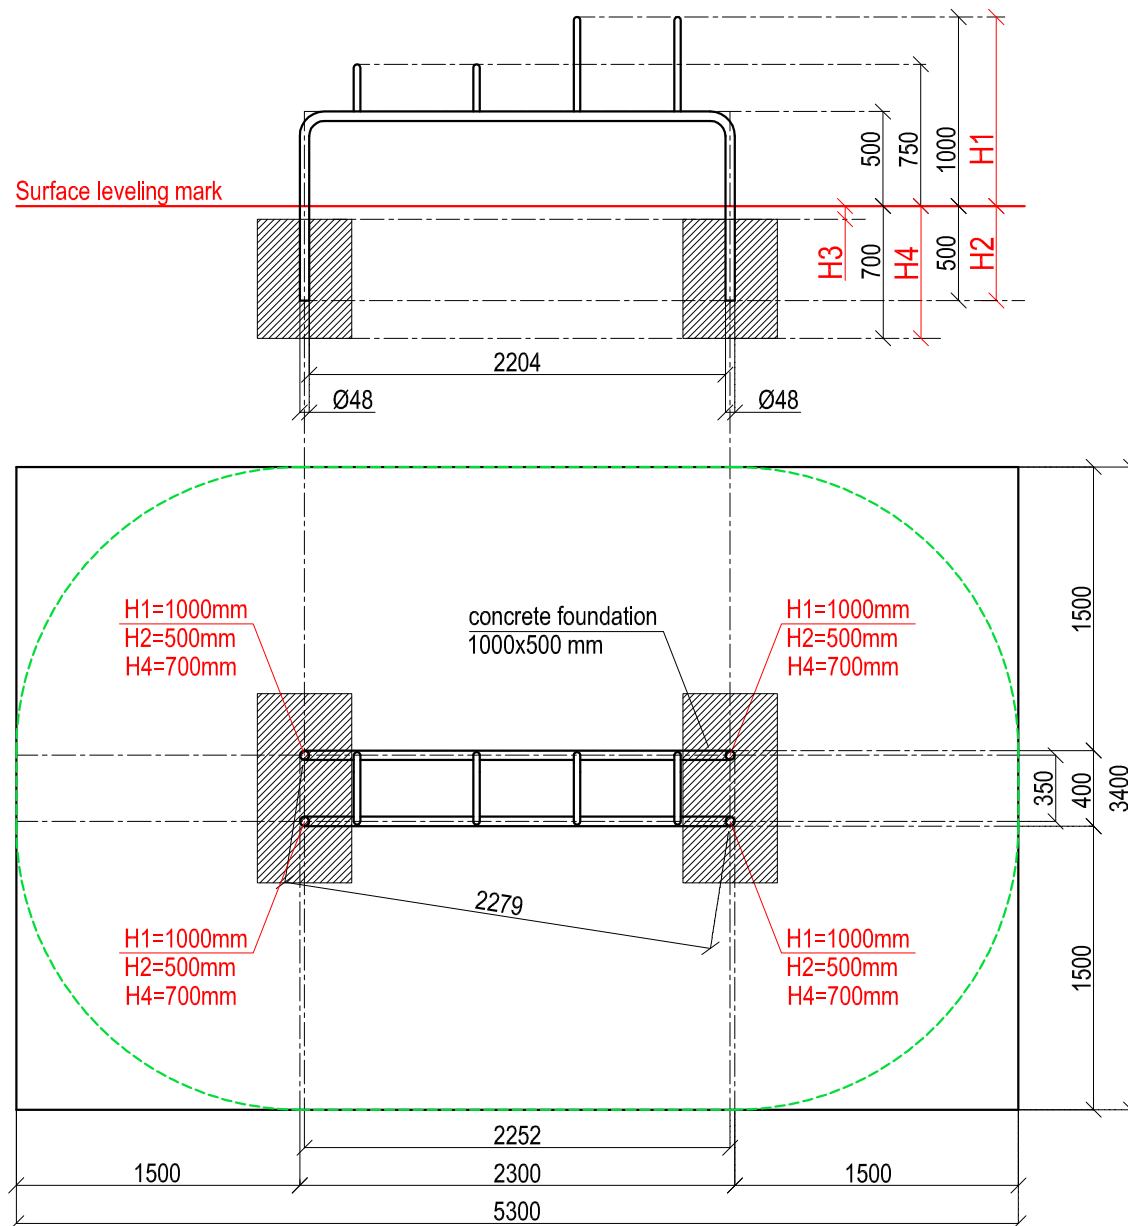



SCALE 1:40



LTD "KENGURU PRO"
 Address: Ezera street 21-28, Riga, Latvia, LV-1034
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-011

Workout desk

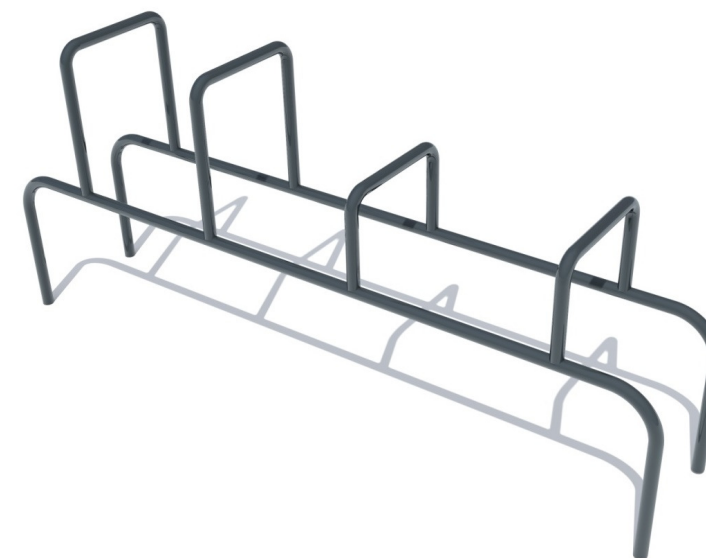

This is a metallic construction with work cover whose length is 2300 mm, width 400 mm, height 500 mm. The construction should have four semi-rings between which there is a distance of 600 mm and 500 mm and 500 mm accordingly. The height of the semi-rings is 250 mm x 250 mm x 350 mm x 350 mm. All elements of the construction - tubes with the diameter from 34 mm - 50 mm. Weight 53 kg

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-011 Workout desk				Technical information	
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	400 mm
				height:	1000 mm
H3	Drop height	H3	Drop height	length:	2300 mm
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	largest part:	2300 mm
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	weight:	53 kg
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	floor space required:	3400 x 5300 mm
70 mm	> 2.1.....2.5 m			pipe measurements:	diameter:
					48.3 mm
					33.7 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10
				max. free fall height:	< 1000 mm
				user age:	children under 14 years only under surveillance of parents
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.