
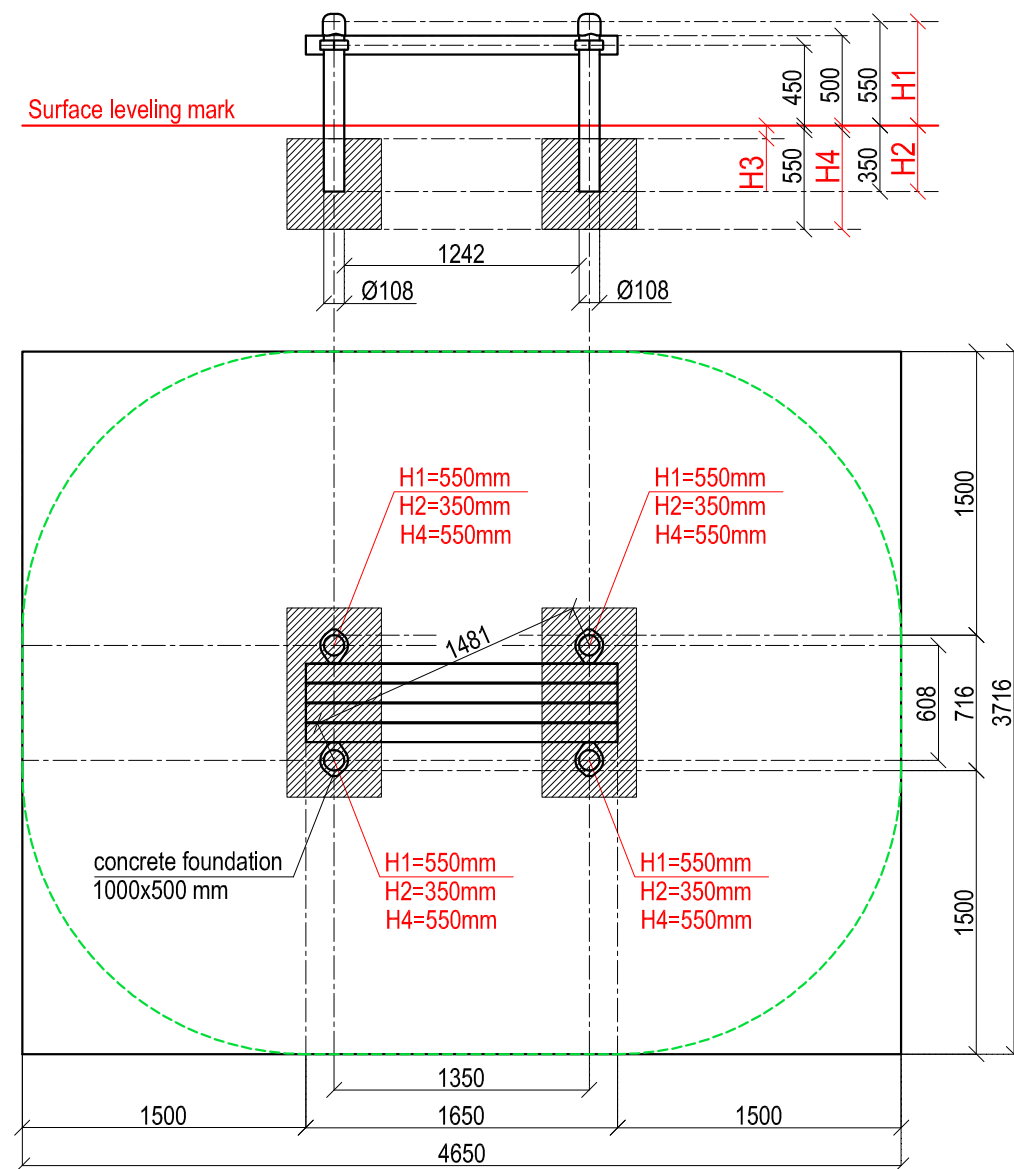



SCALE 1:40



LTD "KENGURU PRO"
 Address: Ezera street 21-28, Riga, Latvia, LV-1034
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-015

Bench

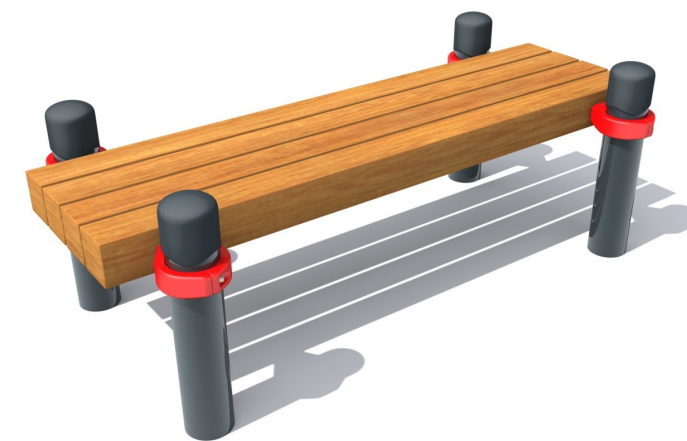

Bench with the length of 1650 mm, width of 500 mm. Wooden bar of the bench is fixed by means of vertical backup columns. The height of the bench is 450 mm. Weight 81 kg

Installation instructions:

- Choose a suitable underground for the unit (**see page 2, table 2!**)
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-015 Bench				Technical information	
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	716 mm
				height:	500 mm
				length:	1650 mm
				largest part:	1650 mm
				weight:	81 kg
				floor space required:	3716 x 4650 mm
				pipe measurements:	diameter: 108 mm
					wall thickness: 3.2 mm
					33.7 mm
					3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10
				wooden beam measurements:	Height, width
					Lenght
					92 x 100
					1650
				wooden parts:	Sikkens Cetol painted, RAL 1006 (maize yellow)
				max. free fall height:	< 500 mm
					possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user age:	
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.

