
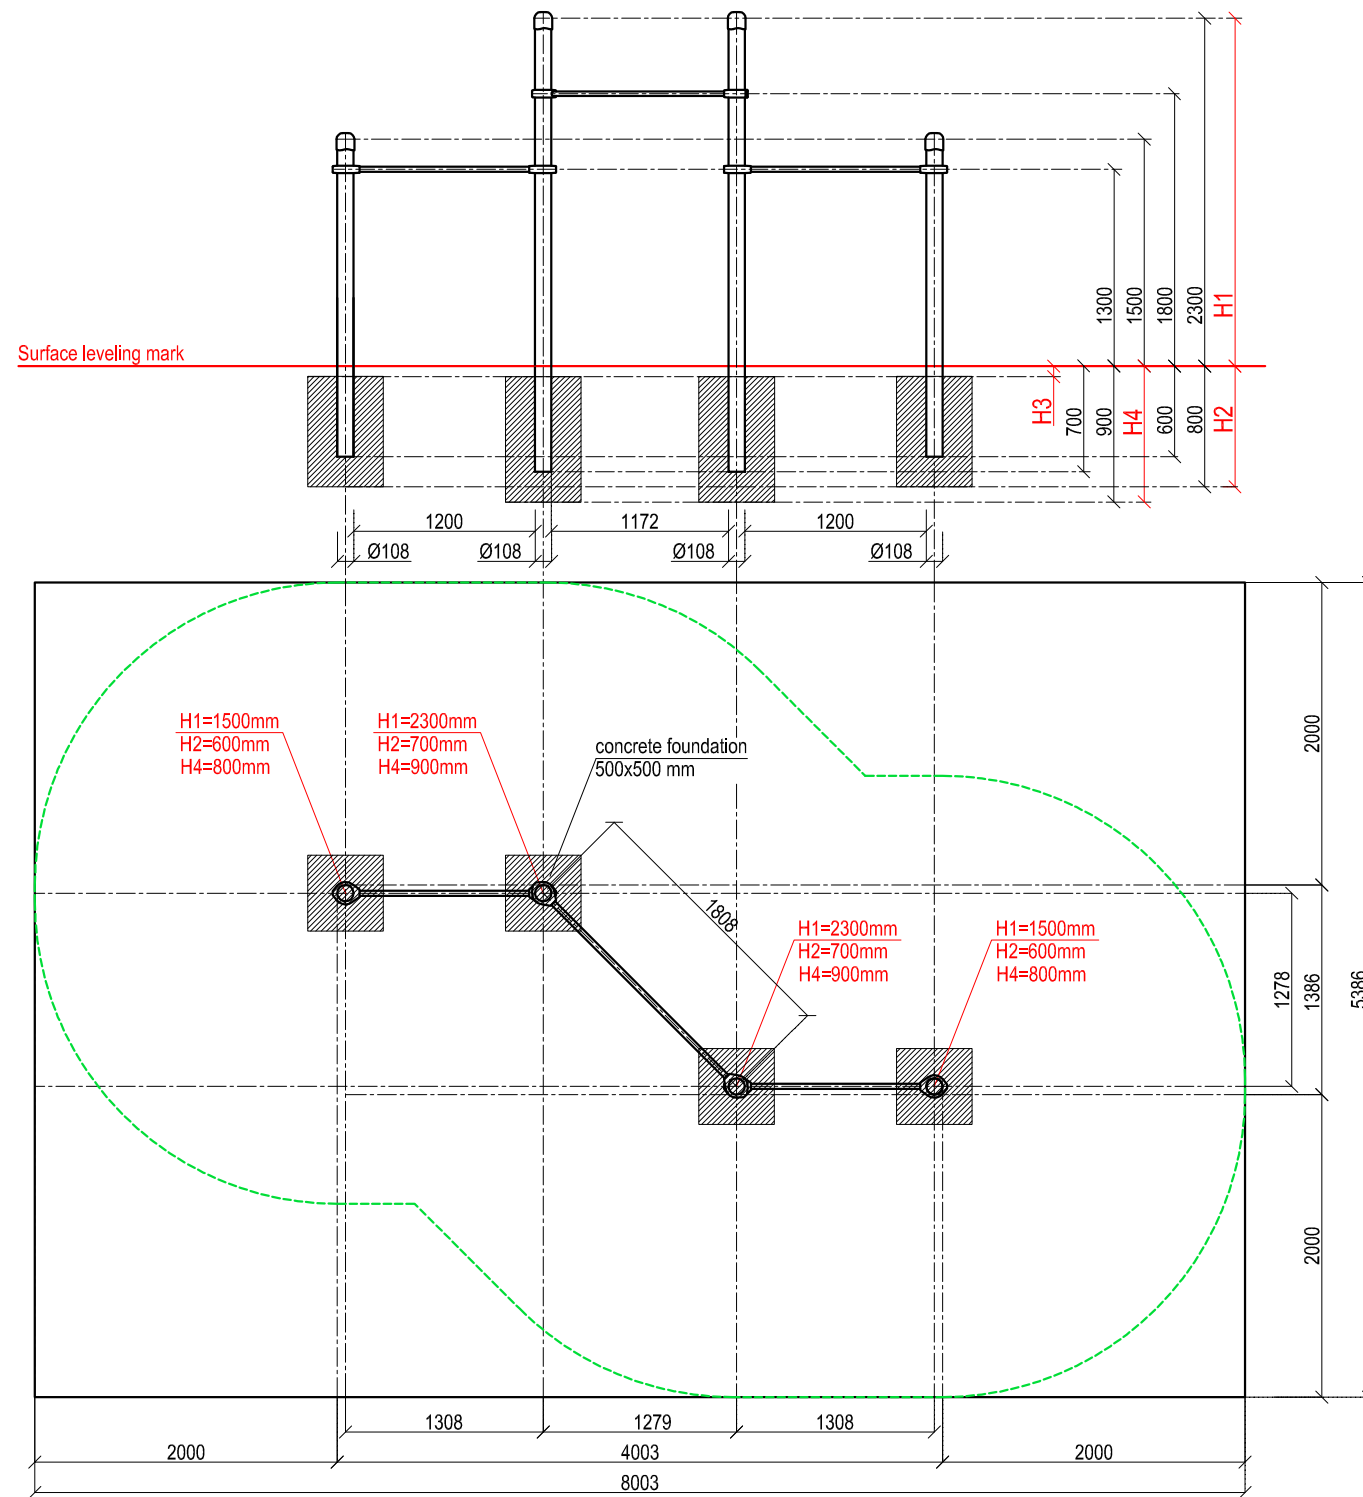



SCALE 1:50



LTD "KENGURU PRO"
 Address: Ezera street 21-28, Riga, Latvia, LV-1034
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-025

Gymbar

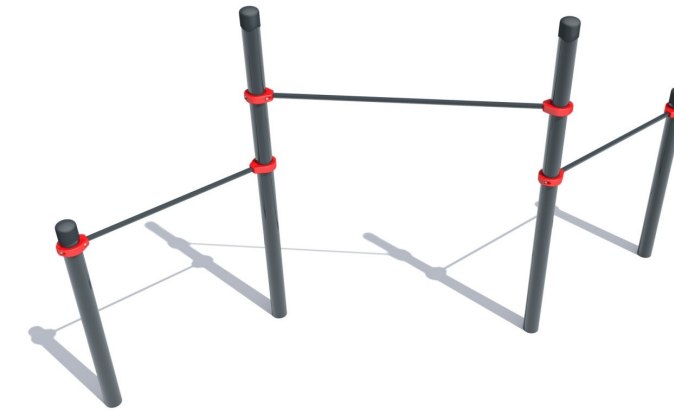

The complex consists of four backup columns at the height of: 2300 mm -2 pieces, 1500 mm-2 pieces. Three crossbars are with the length of: 1200 mm - 2 pieces, 1700 mm- 1 piece. Crossbar with the length 1700 is fixed between columns 2300-2300 at the height 1800mm from the foundation. Crossbars with the length 1200 are fixed between columns 1500-2300 and 2300-1500 at the height 1300mm from the foundation. Weight 112.6 kg

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-025 Gymbar				Technical information				
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	1386 mm			
				height:	2350 mm			
				length:	4003 mm			
				largest part:	3350 mm			
				weight:	112.6 kg			
				floor space required:	5386 x 8003 mm			
				pipe measurements:	diameter:	108 mm	wall thickness:	3.2 mm
					33.7 mm		3.2 mm	
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)			
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)			
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10			
				max. free fall height:	< 1800 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions		
				user age:	children under 14 years only under surveillance of parents			
				maximum user weight:	130 kg			
				certificates:				

