


SCALE 1:40

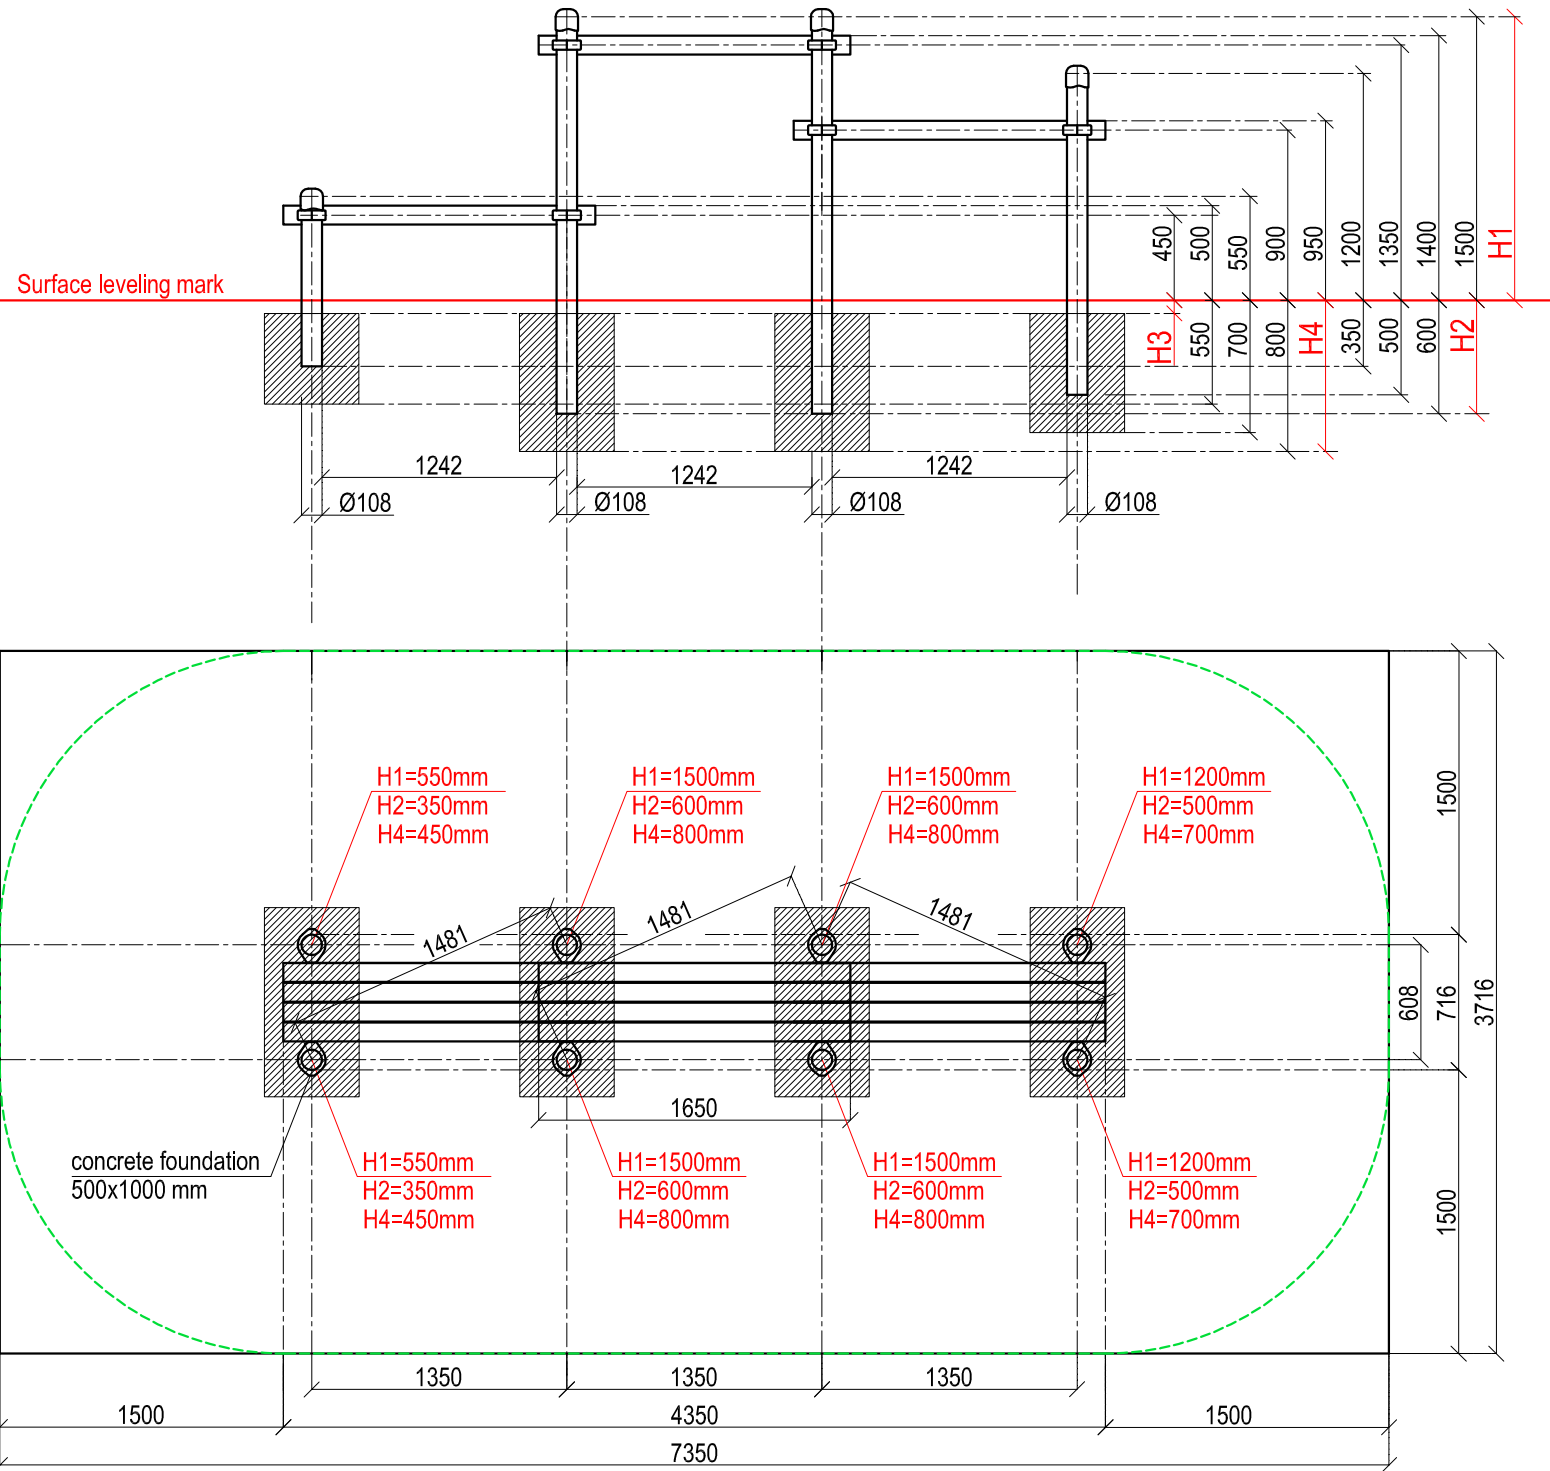

LTD "KENGURU PRO"
Address: Ezera street 21-28, Riga, Latvia, LV-1034
VAT Reg. No. 40103750152
Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
Bank Account: LV65RIKO0002930161161
e-mail: info@kengurupro.eu
www.kengurupro.eu

PK-012

Kenguru PARKOUR



Complex consists of 8 vertical columns with the height of 550 mm- 2 pcs, 1200mm- 2 pcs, 1500mm- 4 pcs and 3 sets of benches. The length of each bench is 1650 mm. Benches are fixed to columns, using crossbars** at different heights: 500, 950 and 1400mm. Crossbar** fittings are put into effect with collars***. Weight - 270.8 kg

Installation instructions:

- Choose a suitable underground for the unit **(see page 2, table 2)!**
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

Foundation plan and area of movement of the Kenguru PARKOUR complex PK-012				Technical information	
Foundation when using Shock absorbing underground (syntethic – rubber granulates)		Beveling of foundation when using loose filling material		width:	716 mm
				height:	1550 mm
				length:	4350 mm
				largest part:	2150 mm
				weight:	270.8 kg
				floor space required:	3716 x 7350 mm
				pipe measurements:	diameter: wall thickness:
					108 mm 3.2 mm
					33.7 mm 3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10
				wooden beam measurements:	Height, width Length
					92 x 100 1650
				wooden parts:	Sikkens Cetol painted, RAL 1006 (maize yellow)
				max. free fall height:	< 1400 mm possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user age:	children under 14 years only under surveillance of parents
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.