
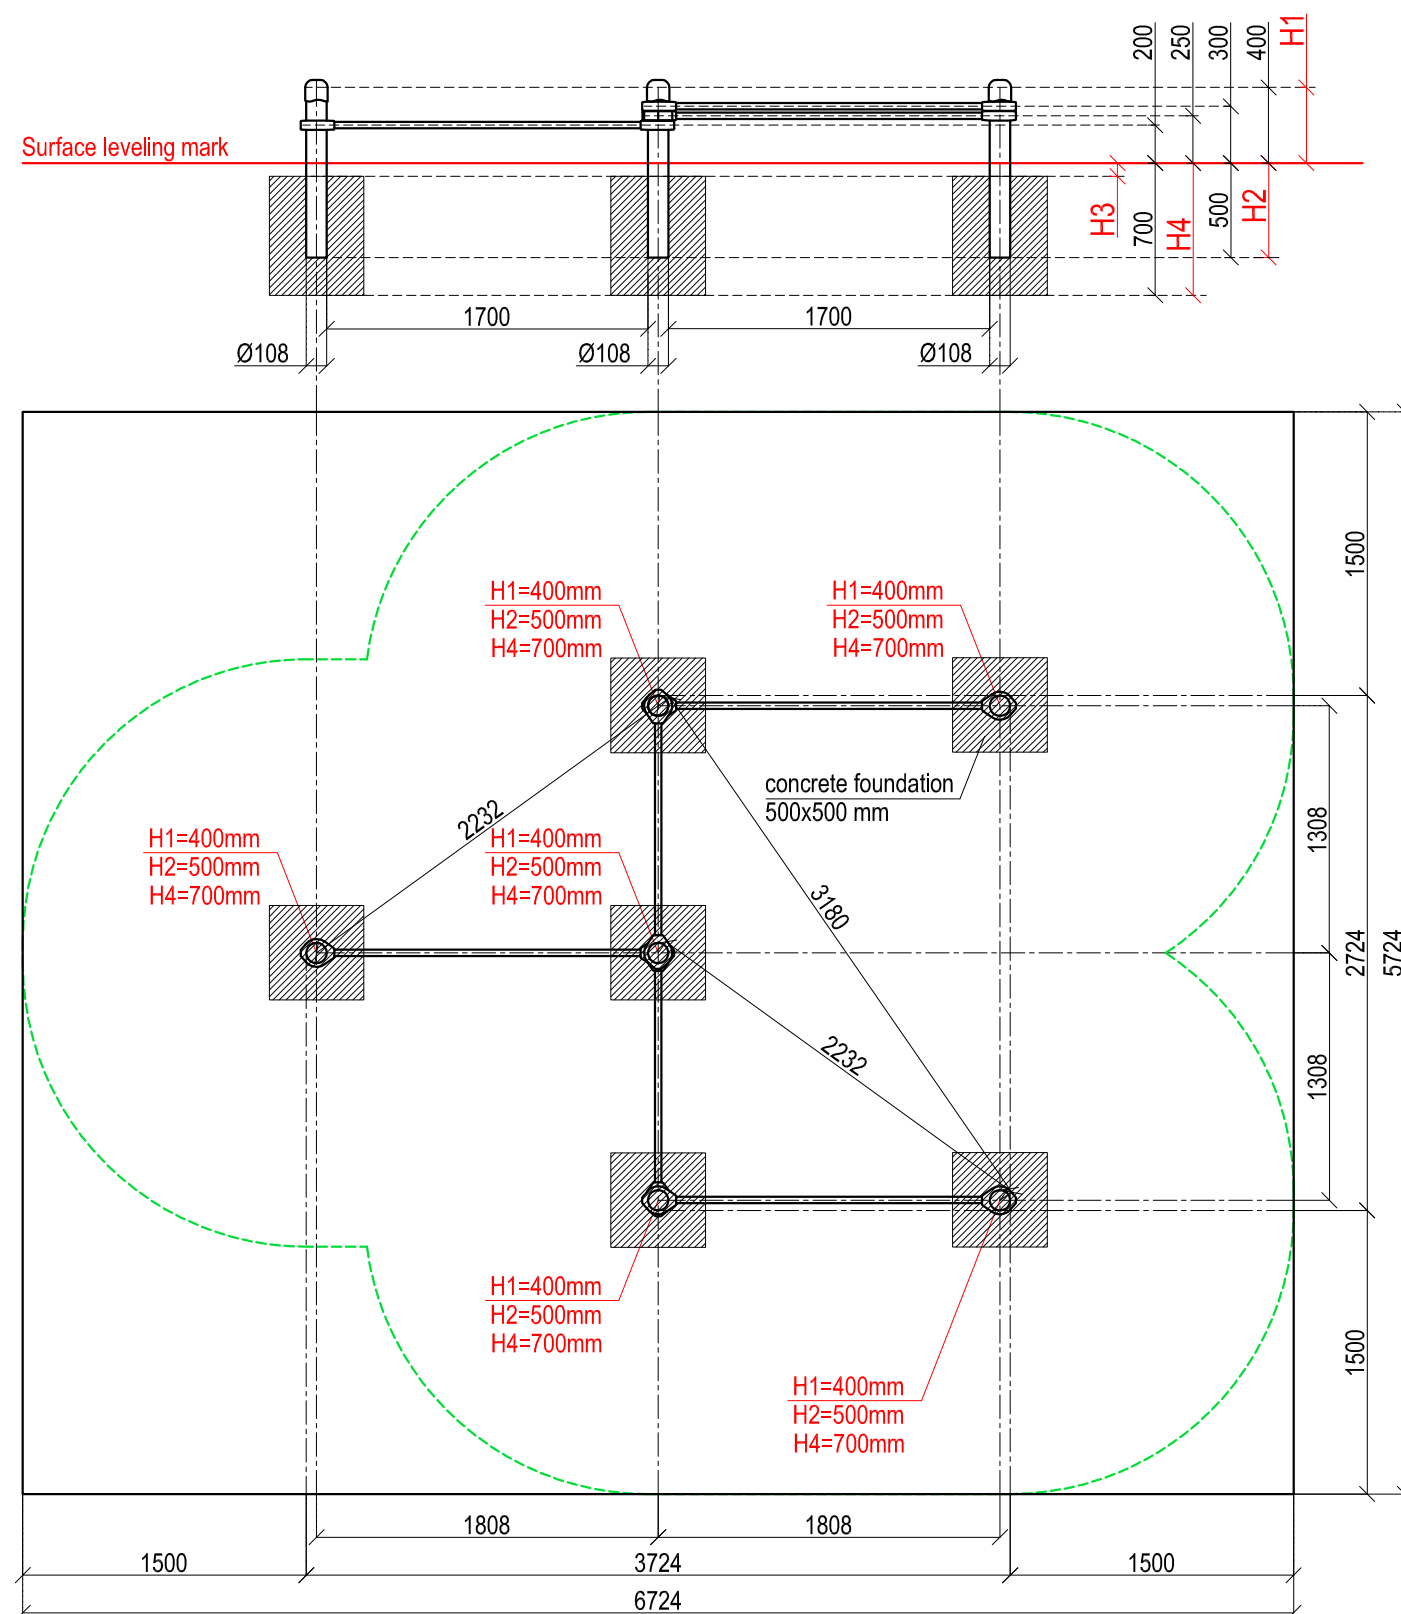



SCALE 1:40



LTD "KENGURU PRO"  
Address: Ezera street 21-28, Riga, Latvia, LV-1034  
VAT Reg. No. 40103750152  
Bank: A/S DNB bank, SWIFT: RIKOLV2X ,  
Bank Account: LV65RIKO0002930161161  
e-mail: info@kengurupro.eu  
www.kengurupro.eu

PK-002

Kenguru PARKOUR

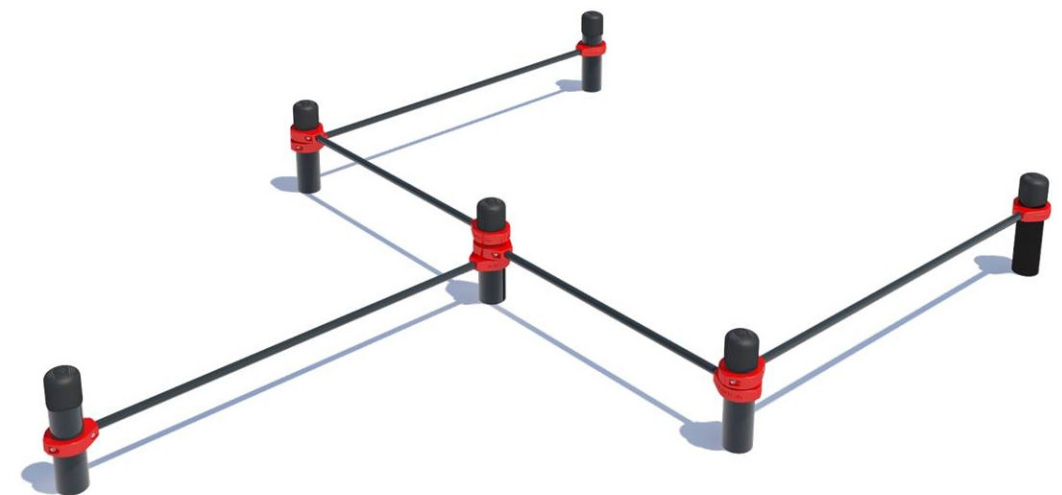

The construction consists of 6 vertical columns\* and five crossbars\*\* placed on the following heights: 200 mm and 250 mm from the rubber foundation. Crossbar fittings are put into effect with collars\*\*\*. The length of crossbars is 1200 mm- 2pcs., 1700mm- 3pcs.. The height of columns is 400 mm. Weight - 78.4 kg

#### Installation instructions:

- Choose a suitable underground for the unit **(see page 2, table 2)!**
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m<sup>3</sup> concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the Kenguru PARKOUR complex PK-002				Technical information	
Foundation when using Shock absorbing underground (syntethic – rubber granulates)		Beveling of foundation when using loose filling material		width:	2724 mm
				height:	450 mm
				length:	3724 mm
				largest part:	1700 mm
				weight:	78.4 kg
				floor space required:	5724 x 6724 mm
				pipe measurements:	diameter:
					108 mm
					33.7 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	steel, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10
				max. free fall height:	< 300 mm
				possible underground see DIN 79000:2012-05 Tab.2 or installation instructions	
				user age:	children under 14 years only under surveillance of parents
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.