
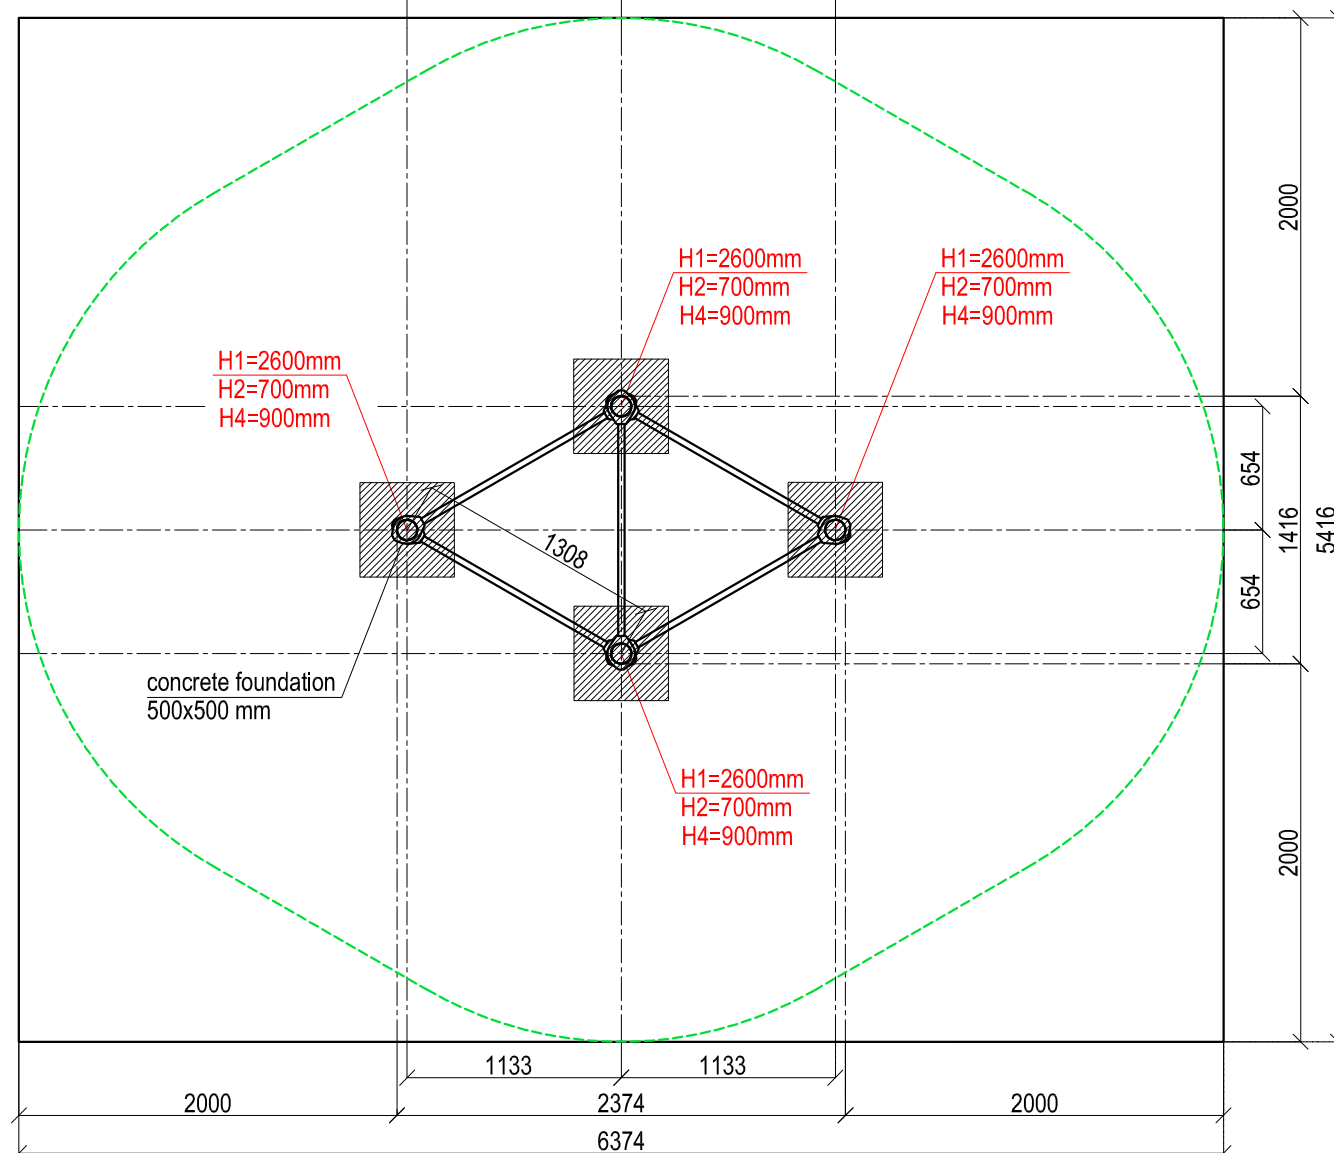
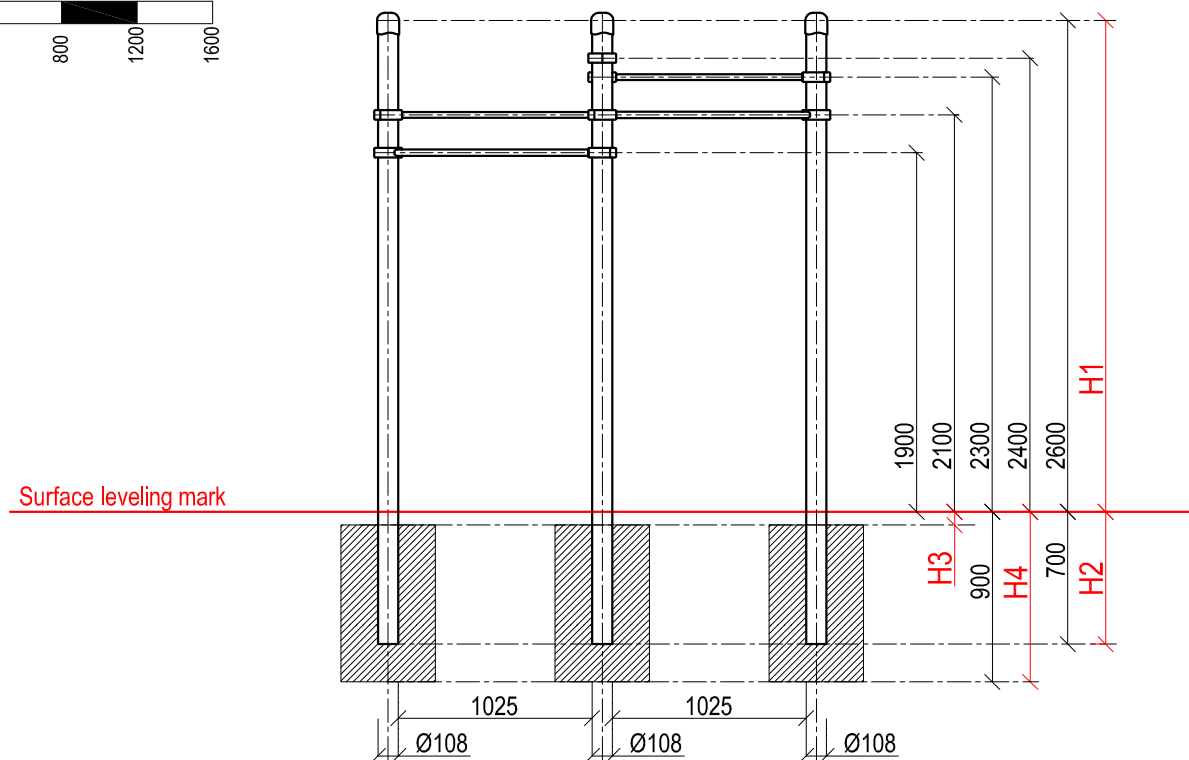



SCALE 1:40



LTD "KENGURU PRO"
 Address: Ezera street 21-28, Riga, Latvia, LV-1034
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-017

Double triangular pull-up bar

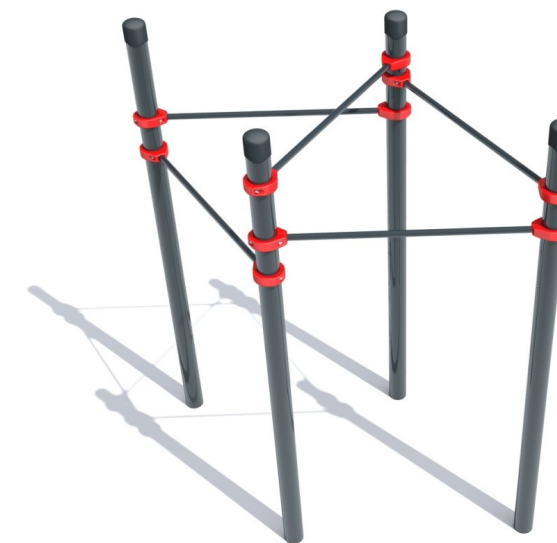

The complex consists of four vertical columns at the height of 2600 mm, 5 crossbars for pull-ups at the height of 2400 mm, 2300 mm, 2100 mm, 1900 mm. The length of crossbars is 1200 mm. Metallic construction of the pull-up bar is fixed with collars to the vertical columns. Weight 153 kg

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-017 Double triangular pull-up bar				Technical information					
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	1416 mm				
				height:	2650 mm				
				length:	2374 mm				
				largest part:	3350 mm				
				weight:	153 kg				
				floor space required:	5416 x 6374 mm				
				pipe measurements:	diameter:	108 mm	wall thickness:	3.2 mm	
								33.7 mm	3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)				
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)				
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10				
				max. free fall height:	< 2400 mm		possible underground see DIN 79000:2012-05 Tab.2 or installation instructions		
				user age:	children under 14 years only under surveillance of parents				
				maximum user weight:	130 kg				
				certificates:	TÜV Rheinland InterCert Kft.				

